

H₂ EDUCATE

Teacher Guide

Information and hands-on activities to teach students about hydrogen as a fuel for the future.



GRADE LEVEL
Intermediate/Secondary

SUBJECT AREAS
Science
Social Studies
Math
Language Arts
Performing Arts
Technology



HYDROGEN CURRICULUM COMMITTEE

Shelly Baumann, Educator, Rockford, MI
Constance Beatty, Educator, Kankakee, IL
Kim Jenkins, Educator, Cynthiana, KY
Barbara Lazar, Educator, Albuquerque, NM
Robert Lazar, Educator, Albuquerque, NM
Bob Thompson, Educator, Glen Ellyn, IL
Karen Reagor, Director of NEED Training, KY
Todd Rogers, New York NEED Coordinator, NY

Technical Review

Sentech, Inc.

Los Alamos National Laboratory

U.S. Fuel Cell Council

Developed by NEED's Teacher Advisory Board Hydrogen Committee
with funding from from the
U.S. Department of Energy Hydrogen Program
and with support and technical assistance from:

Sentech

U.S. Fuel Cell Council

National Hydrogen Association

Los Alamos National Laboratory

NYSERDA

Fuel Cell Store

Unless otherwise noted, all data is from the U.S. Department of Energy, Energy Information Administration
or the Los Alamos National Laboratory

TABLE OF CONTENTS

Correlations to National Science Standards	4-5
Teacher Guide	6-11
Survey Answer Key	11
Jigsaw/Presentation Questions	12
Fuel Cell Simulation Guide	13
Fuel Cell Transparency Master	14
Fuel Cell Simulation Instructions	15
Fuel Cell Simulation Hang Tag Master	16
Evaluation Rubrics	17
Operation of the Fuel Cell Car	18
Hydrogen in the Round Game	19-20
Pre/Post Survey	21
Lab Safety Rules	22
Evaluation Form	23

Materials in Kit

8 Electrolysis Apparatus
16 9-volt Batteries
1 Container Sodium Sulfate
10 Sets of Alligator Connections
25 Splints
100 Straws
2 Packages of Clay
10 Flashing Bulbs
1 Funnel
1 100 ml beaker
8 600 ml beakers
100 Feet of Fringe
2 Flashlights with Batteries
1 Fuel Cell Car with Manual
2 Extra Test Tubes
5 Teacher & 30 Student Guides

Materials Not in Kit

2 Gallons of Distilled Water
8 Packs of Safety Matches
1 Roll of Colored Tape
8 Pairs of Scissors
Lab Safety Equipment (Goggles & Gloves)
3-5 Poster Boards for Presentation Groups
40 Pieces of String for Hang Tags (24")

Set of Consumables

16 9-volt Batteries
2 Packages Clay
1 Container Sodium Sulfate
25 Splints
100 Straws
100 Feet of Fringe
5 Teacher & 30 Student Guides

(bolded standards are emphasized in the unit)

INTERMEDIATE STANDARD–A: SCIENCE AS INQUIRY

1. Abilities Necessary to do Scientific Inquiry

- a. Identify questions that can be answered through scientific inquiry
- b. Design and conduct a scientific investigation
- c. Use appropriate tools and techniques to gather, analyze, and interpret data
- d. Develop descriptions, explanations, predictions, and models using evidence
- e. Think critically and logically to make the relationships between evidence and explanations
- f. Recognize and analyze alternative explanations and predictions
- g. Communicate scientific procedures and explanations

2. Understandings about Scientific Inquiry

- a. **Different kinds of questions require different kinds of scientific investigations, including observing and describing, collecting, experimentation, research, discovery, and making models.**
- b. Current knowledge and understanding guide scientific investigations.
- e. Scientific explanations emphasize evidence, have logical arguments, and use scientific principles, models, and theories.

INTERMEDIATE STANDARD–B: PHYSICAL SCIENCE

1. Properties and Changes of Properties in Matter

- a. **A substance has characteristic properties, such as density, boiling point, and solubility, all of which are independent of the amount of the substance.**
- c. Substances react chemically in characteristic ways with other substances to form new substances (compounds) with different characteristic properties. In chemical reactions, the total mass is conserved.
- e. **There are more than 100 known elements that combine in many ways to produce compounds, which account for the living and nonliving substances in the world.**
- f. **These chemical elements do not break down during normal laboratory reactions involving heat, exposure to electric current, or reaction with acids.**

3. Transfer of Energy

- a. Energy is a property of many substances and is associated with heat, light, electricity, mechanical motion, sound, nuclei, and the nature of a chemical.
- b. **Energy is transferred in many ways.**
- e. **Electrical circuits provide a means of transferring electrical energy.**
- f. In most chemical and nuclear reactions, energy is transferred into or out of a system. Heat, light, mechanical motion, or electricity might all be involved in such transfers.
- g. The sun is the major source of energy for changes on the earth's surface. The sun loses energy by emitting light. A tiny fraction of that light reaches earth, transferring energy from the sun to the earth. The sun's energy arrives as light with a range of wavelengths.

INTERMEDIATE STANDARD–E: SCIENCE AND TECHNOLOGY

2. Understandings about Science and Technology

- a. **Scientific inquiry and technological design have similarities and differences. Scientists propose explanations about the natural world, and engineers propose solutions relating to human problems, needs, and aspirations.**
- c. **Technological solutions are temporary and have side effects. Technologies cost, carry risks, and have benefits.**
- f. **Perfectly designed solutions do not exist. All technological solutions have trade-offs, such as safety, cost, efficiency, and appearance. Risk is part of living in a highly technological world. Reducing risk often results in new technology.**

- g. **Technological designs have constraints. Some constraints are unavoidable, such as properties of materials, or effects of weather and friction. Other constraints limit choices in design, such as environmental protection, human safety, and aesthetics.**

INTERMEDIATE STANDARD–F: SCIENCE IN PERSONAL AND SOCIAL PERSPECTIVES

1. Personal Health

- b. Natural environments may contain substances that are harmful to human beings. Maintaining environmental health involves establishing or monitoring quality standards related to use of soil, water, and air.

2. Populations, Resources, and Environments

- a. When an area becomes overpopulated, the environment will become degraded due to the increased use of resources.
- b. Causes of environmental degradation and resource depletion vary from region to region and from country to country.

3. Natural Hazards

- b. Human activities can induce hazards through resource acquisition, urban growth, land-use decisions, and waste disposal.
- c. Hazards can present personal and societal challenges because misidentifying the change or incorrectly estimating the rate and scale of change may result in either too little attention and significant human costs or too much cost for unneeded preventive measures.

4. Risks and Benefits

- a. Risk analysis considers the type of hazard and estimates the number of people that might be exposed and the number likely to suffer consequences.
- b. Students should understand the risks associated with natural hazards, chemical hazards, biological hazards, social hazards, and personal hazards.
- c. Students can use a systematic approach to thinking critically about risks and benefits.**
- d. Important personal and social decisions are made based on perceptions of benefits and risks.**

5. Science and Technology in Society

- a. Science influences society through its knowledge and world view. The effect of science on society is neither entirely beneficial nor entirely detrimental.
- b. Societal challenges often inspire questions for scientific research, and societal priorities often influence research priorities.**
- c. Technology influences society through its products and processes. Technological changes are often accompanied by social, political, and economic changes that can be beneficial or detrimental to individuals and to society. Social needs, attitudes, and values influence the direction of technological development.**
- d. Science and technology have contributed enormously to economic growth and productivity among societies and groups within societies.
- e. Science cannot answer all questions and technology cannot solve all human problems or meet all human needs. Students should appreciate what science and technology can reasonably contribute to society and what they cannot do. For example, new technologies often will decrease some risks and increase others.

INTERMEDIATE STANDARD–G: HISTORY AND NATURE OF SCIENCE

2. Nature of Science

- c. It is normal for scientists to differ with one another about the interpretation of new evidence. It is part of scientific inquiry to evaluate the results and explanations of other scientists. As scientific knowledge evolves, major disagreements are eventually resolved through such interactions between scientists.

3. History of Science

- c. Tracing the history of science can show how difficult it was for scientific innovators to break through the accepted ideas of their time to reach conclusions that we take for granted today.**

INTRODUCTION TO UNIT

This middle school hydrogen unit is designed as a multidisciplinary curriculum with a hands-on science kit, fuel cell simulation equipment, element modeling materials, fuel cell car kit for demonstration, and language arts, social studies, and technology activities. The unit looks at the energy picture in the United States today, the challenges for the future, the role of hydrogen in meeting those challenges, and the scientific basis for hydrogen as a fuel, with an exploration of electrolysis as a method to generate hydrogen.

TIME

The unit will take up to two weeks in a science classroom or one week as an integrated unit in science, language arts, and social studies.

UNIT PREPARATION

1. Read the **Teacher** and **Student Guides** for an overview of all activities in the unit. Five **Teacher Guides** and a class set of 30 **Student Guides** are included in the kit to facilitate planning an integrated unit.
2. Examine the equipment in the kit to become familiar with its design and to make sure nothing was damaged in shipment. Refer to the *Operating Instructions and Experiment Instructions Manual* in the Fuel Cell Car Kit to gain a more comprehensive understanding of how the car works.
3. Decide how you will structure the unit—as a single class unit or as an integrated unit with other teachers. If this will be an integrated unit, meet with the other teachers to plan and schedule the activities. A suggested integrated unit is as follows:

Pre and Post Survey—Science

Fuel Cell Car Demonstrations—Science

Comparing Energy Systems—Social Studies

Background Reading and Organizers—Language Arts

Electrolysis & Element Models—Science

Hydrogen in Society Jigsaw Activity—Social Studies

Fuel Cell Simulation and Report—Language Arts

Hydrogen Economy Comparison Activity—Social Studies

Hydrogen in the Round Game—Language Arts

4. Collect the materials not included in the kit (**page 3 of the Teacher Guide**).
5. Make copies of the pages in the **Teacher** and **Student Guides** that you want the students to complete or have the students copy them into science notebooks as they need them. It is suggested that the students not write in the **Student Guides**, but keep science notebooks in which they record all of their activities.
6. Place students into groups and assign roles according to the following activities:

Electrolysis—groups of two lab partners

Jigsaw—seven role groups

Jigsaw—three/five presentation groups with one representative of each role group

Simulation—fifteen roles

UNIT PROCEDURE

ACTIVITY ONE: SETTING THE STAGE FOR HYDROGEN

1. Introduce the unit to the class. Demonstrate the hydrogen fuel cell car to stimulate interest.
2. Have the students take the pre-unit Survey and collect the results to send to NEED at the conclusion of the unit (**page 21 of Teacher Guide**).

ACTIVITY TWO: HYDROGEN IN SOCIETY JIGSAW

1. Divide the students into seven groups. Assign each group one of seven specific roles, as listed below. These groups are the **role groups**. Also assign the students to **presentation groups**, in which they will share their role expertise. Each presentation group should include at least one member from each role group.

Role Groups:

- © Physicist
- © Hydrogen Distributor
- © Energy Economist
- © Environmental Scientist
- Hydrogen Producer
- © Energy Security Advisor
- © Energy Efficiency & Reliability Expert

2. Explain the jigsaw assignment to the students. Give each student the list of questions for his/her role group (**page 12 of Teacher Guide**) and a copy of the role group organizer (**page 15 of Student Guide**), and explain that the questions will guide their reading and research. Explain that they will be involved in completing the organizer over several days as they participate in the readings and other hydrogen-related activities. They will use the information they have gathered to design and present projects at the end of the unit in their presentation groups.
3. Instruct the students to use the background material, as well as outside research, to answer their questions as completely as possible. Guide them to the list of hydrogen websites (**page 14 of Student Guide**) where they can go to find additional information.
4. At the end of the Electrolysis and Simulation activities, when the students have read all of the background sections, completed their research and their organizers, have the **role groups** meet to discuss their findings. Instruct the students to add to their organizers any additional information provided by group members.
5. After the students have met in the role groups and completed their discussions, assign them to their **presentation groups**. Explain that the presentation groups will synthesize the information collected by the different role groups.
6. Distribute copies of the presentation questions (**page 12 of Teacher Guide**) and presentation organizer (**page 16 of Student Guide**) to each student. Instruct the presentation groups to work together to answer the presentation questions, using poster-boards to collect members' ideas from each of the role areas.
7. After the groups have answered all of the presentation questions, instruct each presentation group to choose a product with which to present their findings. Suggested products include a Power-Point presentation, a brochure, an expo display board, a song or rap, a letter to the editor of the school newspaper, an opinion paper (persuasive essay), an advertisement, a video, or any other format acceptable to the teacher.
8. Give the groups a timeframe in which to complete and present their projects.
9. Use the Presentation Rubric (**page 17 of Teacher Guide**) to evaluate the projects.

ACTIVITY THREE: COMPARING ENERGY SYSTEMS

1. Have the students read the following background sections (**pages 4-5 of Student Guide**):
The Energy Picture Today, Looking to the Future, and The Ideal Energy System
2. Have the students draw Venn diagrams (**page 17 of Student Guide**) to compare the energy system in the United States today with the ideal energy system.
3. Discuss with the class the problems with our energy system today.
4. Brainstorm ideas for making today's energy system more ideal.

ACTIVITY FOUR: THE SCIENCE OF HYDROGEN

1. Have the students complete the graphic organizer (**page 18 of the Student Guide**) as they read the following background sections (**pages 5-7 of Student Guide**):
What is Hydrogen?, Atomic Structure, and The Periodic Table
2. Discuss any questions the students have.

ACTIVITY FIVE: ELECTROLYSIS (SIMULTANEOUS ACTIVITY WITH ACTIVITY SIX—ELEMENT MODELING)

PREPARATION

1. Write the Variable Questions and Discussion Questions (**page 9 of Teacher Guide**) on the board.
2. Prepare 1 gallon of the electrolyte solution (100 cm³ of Na₂SO₄ to 1 gallon water) as follows:

Pour 100 ml from a 1-gallon plastic jug of distilled water into a clean container (this distilled water can be used for the Fuel Cell Car Demonstration).

Add 100 cm³ (100 ml) of sodium sulfate (Na₂SO₄) to the jug of distilled water using the small beaker and funnel. Close the jug and gently shake the jug until the sodium sulfate is dissolved.

NOTE: The solution should be saved in the jug for subsequent group use after the first group of students has completed the experiment. The solution can be saved indefinitely in a plastic container; if you are saving it in the distilled water jug, be sure to clearly mark the jug with its contents.

NOTE: The electrolysis process will proceed more quickly if the electrolyte solution is very warm or more concentrated. If the chemical reaction is too slow, the students may lose interest. It is suggested that you place the container with the electrolyte solution in a hot water bath approximately an hour before the lab is scheduled. If this is not feasible, you may increase the concentration of the solution by adding 10 cm³ more sodium sulfate to the solution.

Fill 8 600-ml beakers with 500 ml of the electrolyte solution.

3. Set up eight lab stations with the following equipment:

1 Electrolysis Apparatus (with two test tubes and set of tongs)

1 Beaker with 500 ml of Electrolyte Solution

1 Splint

Lab Safety Equipment (Goggles & Gloves)

1 9-volt Battery

2 Alligator Connectors

1 Book of Safety Matches

LAB SAFETY

1. Go over the Lab Safety rules (**page 22 of the Teacher Guide**) and the Material Safety Data Sheet (MSDS) for Sodium Sulfate included in the kit with the students. Reinforce any other lab safety rules that you require.
2. Decide if you want the students to use the matches and splints on their own or only with teacher supervision. Be prepared to explain to the students any changes in the lab procedure.

ASSIGNMENT GROUPS‡

1. Assign students in groups of two to lab stations or element modeling stations. Sixteen students will participate in the lab during the first rotation and the remaining students will participate in the element modeling activity. In the second rotation, the students will switch activities.

PROCEDURE‡

1. Have the students read *How Is Hydrogen Made?*, the *Electrolysis* background information, *Electrolysis Exploration*, and *Electrolysis Data Recording Form* (pages 8, 19-22 of Student Guide). Answer any student questions and provide instructions about recording the data in the students' notebooks. If necessary, review the lab procedure (page 21 of Student Guide).
2. Assign the students in pairs to the lab stations and monitor their work.
3. When the students have completed the lab, have them return the electrolyte solution to the beakers and rinse the electrolysis apparatus, test tubes, and tongs under running water. Collect the electrolyte solution from the beakers and store in the marked container for reuse.
4. Instruct the students to answer the **Discussion Questions** in their notebooks.
5. Have the students who were participating in the Element Modeling Activity conduct the lab, following the same procedure.
6. When all students have completed the lab, have them formulate hypotheses and design lab procedures to answer the Variable Questions.

DISCUSSION QUESTIONS

1. What did you learn about the composition of water?
2. Explain how electrical energy decomposes water. Use the terms anode, cathode, oxidation, and reduction.
3. Which gas is attracted to the positive electrode and which gas is attracted to the negative electrode? Explain why each gas is attracted to each electrode.
4. Explain how to test for hydrogen and oxygen gases.
5. Balance this equation for the decomposition of water: $8 \text{H}_2\text{O} = __ \text{H}_2 + __ \text{O}_2$. (Answer: $8\text{H}_2 + 4\text{O}_2$)

VARIABLE QUESTIONS

1. How would using distilled water with no electrolyte affect the results?
2. How would increasing the concentration of the electrolyte affect the results?
3. How would increasing the voltage affect the results? (Connecting 2-4 batteries in parallel)
4. How would increasing the current affect the results? (Connecting 2-4 batteries in series)
5. How would changing the temperature of the solution affect the results?
6. How would using salt or baking soda as the electrolyte affect the results?

ELECTROLYSIS EXTENSIONS

EXPLORING VARIABLES‡

1. Have groups of students conduct the lab experiments that they designed to explore the variables in the questions listed above.
2. Have the student groups share the results of their variable experiments with the class.

GRAPHING RESULTS‡

1. On graph paper or using a computer-graphing program, have each lab group graph the volume of hydrogen (y-axis) in cubic centimeters vs. time (x-axis) in minutes. On the same graph, plot the volume of oxygen vs. time.
2. Have the students interpret the results of the graphs.
3. Have the students plot the slope of the hydrogen line and the slope of the oxygen line. These slopes represent the average of the volumes of both gases over time. By dividing the slope of the hydrogen by the slope of the oxygen and expressing the result as a rounded whole number over 1, you will have a more accurate determination of the gas ratios. The formula for the slope:

$$\text{Slope} = \frac{Y_2 - Y_1}{X_2 - X_1}$$

ACTIVITY SIX: ELEMENT MODELING (SIMULTANEOUS ACTIVITY WITH ELECTROLYSIS LAB ACTIVITY)

PREPARATION‡

1. Prepare one or more work areas large enough for 16 students to complete the activity with the following materials:

Straws **Clay** **Scissors**

PROCEDURE‡

1. Have the students read the *Element Models* activity (page 23 of the Student Guide). Answer any student questions.
2. Assign students to the work area, instruct them to complete the activity, using their science notebooks to define the key terms and draw diagrams of their molecules. Monitor student work.
3. When the students have completed the activity, which will not take as much time as the lab activity, instruct them to work on the jigsaw activity.

ELEMENT MODEL PERFORMANCE ASSESSMENT‡

Students should be able to distinguish between atoms and molecules and draw diagrams of simple molecules. Students' knowledge of basic molecular structure should be significantly enhanced.

ACTIVITY SEVEN: FUEL CELL ACTIVITYC

1. Read the separate, detailed instructions for conducting the Fuel Cell Simulation Activity (pages 13-16 of the Teacher Guide).
2. Set up a large open area with the following materials:

Flashing Bulbs **Fringe** **Scissors**
 Flashlight **Colored Tape** **Hang Tags**

3. Follow the separate instructions for conducting and assessing the activity.

ACTIVITY EIGHT: HYDROGEN ECONOMY COMPARISONC

1. Have students read the following background sections (pages 9, 11-13 of Student Guide):
Hydrogen as a Fuel, Uses of Hydrogen, The Challenges of Hydrogen, Hydrogen Storage, Hydrogen Distribution, Hydrogen Safety, and Reaching a Hydrogen Economy.
2. Have students draw Venn diagrams to compare a hydrogen economy with the ideal energy system (page 25 of Student Guide). Discuss.

ACTIVITY NINE: HYDROGEN IN THE ROUND GAME (VOCABULARY REINFORCEMENT)

PREPARATION‡

1. Make copies of the Hydrogen in the Round questions and answers on heavy weight paper or card stock (**pages 19-20 of Teacher Guide**). You may want to use different colors for each round.
2. Cut out the individual cards, keeping Round 1 and Round 2 cards separate.

PROCEDURE‡

1. Distribute the Round 1 cards randomly to the students. If you have fewer than 30 students in the class, give some students two cards. All of the cards must be distributed for the game to succeed. If you have more than 30 students, have some students sit out the first round and participate in the second round. These students can also serve as arbiters of disputes.

2. Explain the instructions for the game, as follows:

The student who has the card labeled START begins by reading the question that follows the word START, "Who has....."

The student who has the answer to the question stands up and responds by reading his/her card, "I have -----, Who has -----?"

This procedure continues until every person has read his/her card and the question has returned to the Starter, who answers the last question, and says, "The End."

3. Collect the Round 1 cards and distribute the Round 2 cards. Proceed to play Round 2 in the same way as Round 1.
4. Collect the Round 2 cards and save. You can repeat this activity throughout the unit to reinforce vocabulary.

ACTIVITY TEN: EVALUATION

1. Have the students take the post-unit Survey and collect the results (**page 21 of Teacher Guide**).
2. Complete the unit Evaluation Form with the students (**page 23 of Teacher Guide**).
3. Send the pre and post Survey results and the Evaluation Form to the NEED Project:

The NEED Project
8408 Kao Circle
Manassas, VA 20110
FAX: 1-800-847-1820

ANSWERS TO SURVEY

1. c 2. b 3. d 4. c 5. c 6. T 7. F 8. d 9. c 10. c 11. d 12. F 13. T 14. T 15. T

JIGSAW ROLE QUESTIONS AND PRESENTATION QUESTIONS

Sustainability: Physicist

1. What are the physical and chemical properties of hydrogen?
2. How can hydrogen be stored?
3. What are the different sources of hydrogen on earth?
4. Which sources of hydrogen hold promise for a long-term energy solution?

Production: Hydrogen Producer

1. What are the processes currently being used to separate hydrogen?
2. What are the challenges of producing hydrogen in large amounts?
3. What safety issues are associated with separating hydrogen?
4. How does the cost of producing hydrogen compare to other fuels?

Delivery/Distribution: Energy Distributor

1. In what forms can hydrogen be stored and transported?
2. What distribution technologies are currently in use?
3. What are the challenges of refueling hydrogen operations?
4. Identify and explain the properties of hydrogen that make it difficult to transport.

Energy Security: Energy Security Advisor

1. What is energy security and why is it important to the United States?
2. Why is it important to reduce our dependence on imported energy?
3. How could the use of hydrogen decrease our dependence on imported energy?
4. What other alternatives would reduce our dependence on imported energy?

Economics: Energy Economist

1. What are the advantages of a hydrogen economy?
2. How would a hydrogen-based economy look different from our current energy economy?
3. How does the cost of hydrogen applications compare to other alternative fuels?
4. What would help the transition from a nonrenewable energy economy to a hydrogen economy?

Efficiency & Reliability: Energy Efficiency & Reliability Expert

1. What current technologies use hydrogen as a fuel?
2. How would the use of hydrogen be more efficient than the fuels we currently use?
3. How does the reliability of fuel cells compare to the reliability of other power systems?
4. What technological advances would make the use of hydrogen more efficient and reliable?

Environment: Environmental Scientist

1. What are the resources from which hydrogen can be produced (extracted)?
2. What are the environmental advantages of each of these sources?
3. What are the environmental disadvantages of each of these sources?
4. How does hydrogen compare environmentally to the fuels used in the U. S. today?

Presentation Questions

1. What important facts have you learned about hydrogen?
2. What are the advantages of hydrogen?
3. What are the disadvantages of hydrogen?
4. What are the ways hydrogen could be used in the future?
5. What are your opinions about hydrogen?

PEM FUEL CELL: A SIMULATION ACTIVITY

GOAL:

To introduce the concept of a PEM fuel cell, what it is and how it works, through a simulation activity.

TIME:

One – two class periods

OBJECTIVES:

Upon completion of this activity, students will be able to:

- explain the components of a PEM fuel cell and how it works.
- understand how hydrogen is used to carry energy and generate electricity.
- trace the flow of the system of a PEM fuel cell by accurately drawing and labeling a diagram.

PREPARATION:

1. Write the vocabulary list below onto the board.
2. Make an overhead transparency of the PEM Cell diagram (**page 14 of Teacher Guide**).
3. Make four copies of the Hang Tag master (**page 16 of Teacher Guide**) onto card stock, cut out the hang tags and attach string to each tag. The hydrogen and oxygen hang tags are two-sided tags, folded on the dotted lines.

PROCEDURE:

1. Have the students review the vocabulary terms, using the Glossary (**pages 26-27 of Student Guide**).
2. Use the transparency to introduce the operation of a fuel cell to the students.
3. Have the students read the **What is a Fuel Cell?** background information and the **Fuel Cell** activity instructions (**pages 11 and 24 of the Student Guide**). Answer any student questions.
4. Assign roles to the students. Some students may be observers during the first simulation, then assume roles in a second simulation while the other students observe.

VOCABULARY:

A working knowledge of the following words and terms is needed to understand the concepts used in this simulation activity. These words should be used in the final written assessment.

Hydrogen	Ion	Oxygen	Circuit	PEM	Polymer	Electrolyte	Membrane
Electron	Atom	Molecule	Electrode	Anode	Cathode	Catalyst	Electrolysis


SIMULATION SUGGESTIONS:

1. Students will need a 10' x 10' open space; use a hallway, outside area, or gym to allow enough room for movement and observers. Have the students set up the simulation according to the diagram.
2. Let students determine how to conduct the simulation—part of the learning value of this activity is allowing students to discover and learn by doing, extending and reinforcing prior knowledge.

ASSESSMENT:

After participating in and observing the simulation several times, have the students imagine they are writing to other students to explain how a fuel cell works, with an explanation of how fuel cells are used. Students must use the vocabulary words and draw diagrams to support their explanations.

Use the Simulation Rubric (**page 17 of Teacher Guide**) to assess vocabulary acquisition and understanding of concepts.

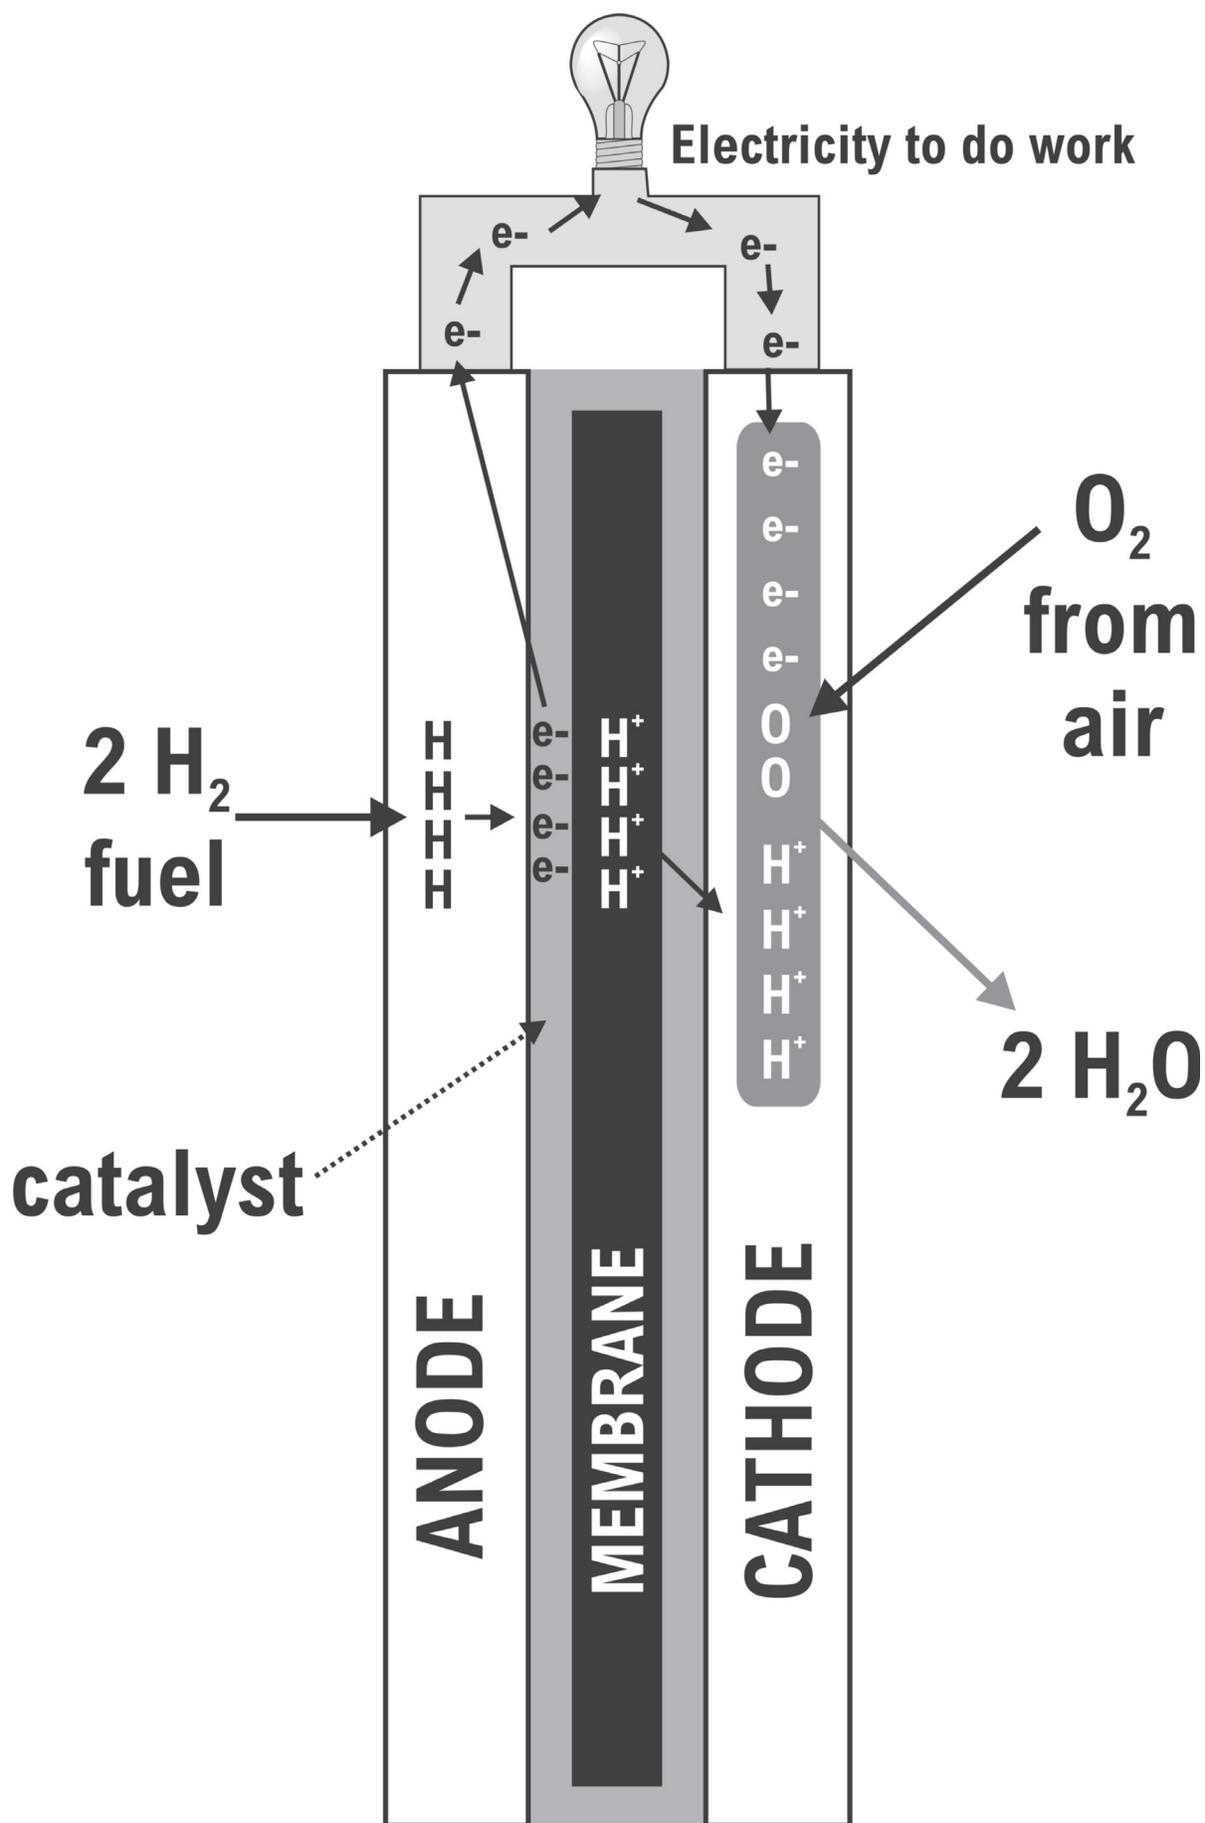

FUEL CELL SIMULATION


Students (15) representing the following roles:

- 4 Hydrogen atoms (H)
- 2 Oxygen atoms (O)
- 2 Anodes (A)
- 2 Cathodes (CA)
- 2 PEMs (P)
- 3 Circuit Members (C)

Materials:

- 4 pieces of fringe (six feet long)
- 4 flashing bulbs
- 1 flashlight
- 1 piece of colored tape to make circuit on floor*
- 1 hangtag for each student* (master on page 16)

* not in kit

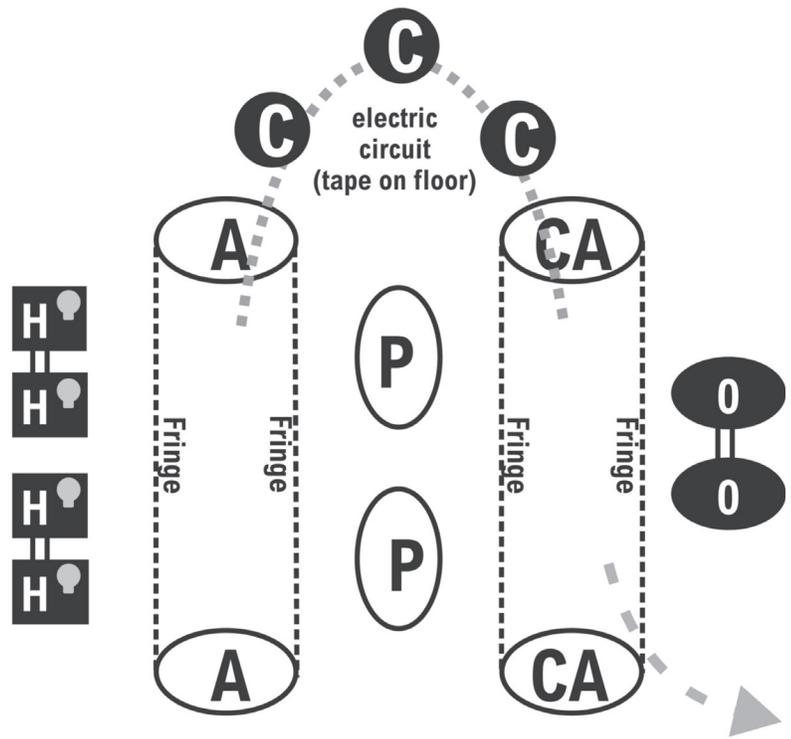

All students wear hangtags representing their roles. The Hydrogen hangtags have H on one side and H^+ on the other. The Oxygen hangtags have O on one side and O^{2-} on the other.

The two Anodes hold up two pieces of six-foot fringe forming a rectangle. The two Cathodes hold up two pieces of six-foot fringe forming a rectangle.

The two PEMs stand between the Anode and Cathode.

Two sets of two Hydrogens link arms to create two hydrogen molecules on the outside of the Anode. Each Hydrogen carries a flashing bulb (turned off) that represents its electron.

Two Oxygens link arms to create an Oxygen molecule on the outside of the Cathode.

The Hydrogens pass through the fringe into the Anode and separate into two Hydrogen atoms.

The Oxygens pass through the fringe into the Cathode and separate into two Oxygen atoms.

The Hydrogen atoms pass through the inner fringe.


The PEMs stop the Hydrogen atoms from moving.

The Hydrogen atoms hand their electrons to the first Circuit Member and turn their hangtags to H^+ ions.

The PEMs allow the H^+ ions to pass through to the Cathode.

The Circuit Member turns on the flashing bulbs and hands them to the middle Circuit Member, who turns on a flashlight as he/she receives the electrons and turns the flashlight off as he/she passes the electrons to the last Circuit Member. The last Circuit Member hands two electrons to each Oxygen atom in the Cathode, who turns the flashers off and switches his/her hangtag to Oxygen ion (O^{2-}).

Two Hydrogen ions link arms with an Oxygen ion (with the Oxygen in the middle), turning their hangtags and forming a water molecule. The water molecules then exit the outside of the Cathode.

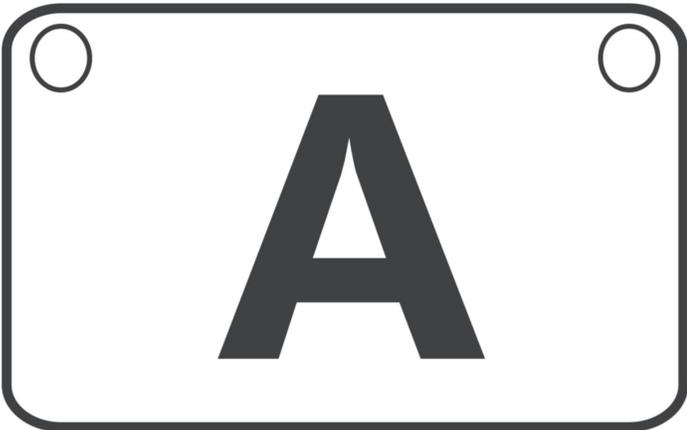

GRADING RUBRIC—SIMULATION

Grade	Scientific Concepts	Diagrams	Procedure	Summary
4©	Written explanation illustrates accurate and thorough understanding of scientific concepts underlying simulation.	Comprehensive diagrams are accurately and neatly labeled and make the simulation easier to understand.	Procedures are listed in clear steps. Each step is numbered and is written as a complete sentence.	Summary describes information and skills learned, as well as some future applications to real life situations.
3©	Written explanation illustrates an accurate understanding of most scientific concepts underlying simulation.	Necessary diagrams are accurately and neatly labeled.	Procedures are listed in a logical order, but steps are not numbered or are not in complete sentences.	Summary describes the information learned and a possible application to a real life application.
2©	Written explanation illustrates a limited understanding of scientific concepts underlying simulation.	Necessary diagrams are labeled.	Procedures are listed but are not in a logical order or are difficult to understand.	Summary describes the information learned.
1©	Written explanation illustrates an inaccurate understanding of scientific concepts.	Necessary diagrams or important components of diagrams are missing.	Procedures do not accurately reflect the steps of the simulation.	Summary is missing or inaccurate.

GRADING RUBRIC—PRESENTATION PROJECT

Grade	Content	Organization	Originality	Workload
4©	Project covers the topic in-depth with many details and examples. Subject knowledge is excellent.	Content is very well organized and presented in a logical sequence.	Project shows much original thought. Ideas are creative and inventive.	The workload is divided and shared equally by all members of the group.
3©	Project includes essential information about the topic. Subject knowledge is good.	Content is logically organized.	Project shows some original thought. Work shows new ideas and insights.	The workload is divided and shared fairly equally by all group members, but workloads may vary.
2©	Project includes essential information about the topic, but there are 1-2 factual errors.	Content is logically organized with a few confusing sections.	Project provides essential information, but there is little evidence of original thinking.	The workload is divided, but one person in the group is viewed as not doing fair share of the work.
1©	Project includes minimal information or there are several factual errors.	There is no clear organizational structure, just a compilation of facts.	Project provides some essential information, but no original thought.	The workload is not divided, or several members are not doing fair share of the work.

OPERATION OF THE FUEL CELL CAR

The hydro-Genius™ Fuel Cell Car should be used only by a knowledgeable teacher or by students under the supervision of the teacher. The teacher must ensure proper handling and draw attention to potential dangers. Before using the car, review the **Operating Instructions and Experiment Instructions Manual** in the car kit to fully understand operational safety precautions. All participants should wear protective goggles.

The car should be assembled and operated on a solid, level surface, with the ambient temperature between 10° C and 35° C. It is recommended that you operate the car indoors to protect it from the weather.

BASIC FUNCTION

Here are the basics of how the fuel cell works. Refer to the **Operation Instructions and Experiment Instructions Manual** for technical data.

1. Use **ONLY a 9-volt battery** to provide the electricity to power the electrolysis process.
2. The electric current splits the water molecules into hydrogen and oxygen gases in the charge mode of the reversible fuel cell. The gases are stored in the storage cylinders.
3. In the discharge mode, the fuel cell uses the hydrogen and oxygen gases as fuel to generate an electric current that runs the electric motor of the car, producing water and heat as byproducts.

REVERSIBLE FUEL CELL

To charge the fuel cell, it should be filled with approximately 40 ml of distilled water. A clean wash bottle or small beaker can simplify this operation.




Caution: Only distilled water should be used. Use of any other liquid, even tap water, may destroy the fuel cell membrane.

Filling and charging the fuel cell:

1. Turn the cell upside down and remove the stopper from the bottom of the hydrogen storage cylinder. Fill the cylinder with as much **distilled water** as possible, then replace the stopper. Repeat the procedure for the oxygen storage cylinder. (Diagram 1)
2. Turn the fuel cell right side up. The lower sections of both cylinders should be completely filled with water. Let the apparatus sit for 10 minutes to allow the water to saturate the cell membrane.
3. Charge the cell by attaching it to the 9-volt battery with the alligator clips, making sure the polarity is correct (black to negative terminal; red to positive terminal). (Diagram 2)
4. When the hydrogen cylinder is filled with gas, detach the battery.

Attaching the fuel cell and operating the car:

1. Align the pins on the bottom of the fuel cell with the U-shaped notches in the center of the chassis. Tilt the fuel cell at a 45-degree angle so that the back pin slides into the back slot of the chassis. Push down to snap the front pin into place.
2. Connect the cables from the motor to the fuel cell (Diagram 3).
3. The charged fuel cell is now attached to the motor and the car is operational. The front axle is adjustable; straighten it before letting the car go on a flat surface with minimal friction.
4. You can recharge the fuel cell as often as needed.

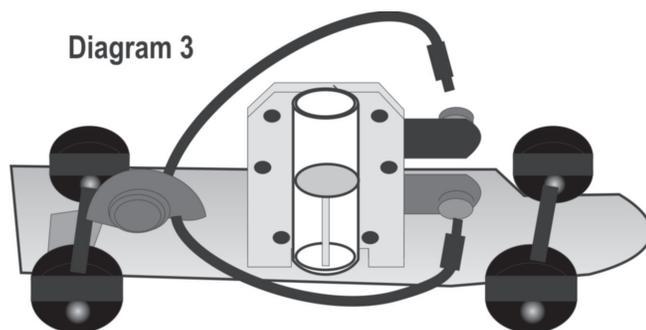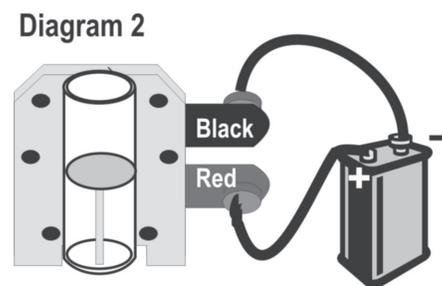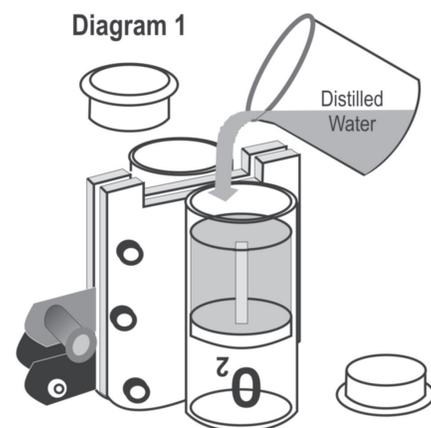

HYDROGEN IN THE ROUND 1

<p>I have Hydrogen. THE END START: Who has a name for a substance in which all of the atoms are identical?</p>	<p>I have Photoelectrolysis. Who has the method of producing hydrogen by superheating wood and agricultural waste?</p>	<p>I have Cathode. Who has an atom or group of atoms that has an electrical charge?</p>
<p>I have Element. Who has the positively charged subatomic particle in the nucleus of an atom?</p>	<p>I have Biomass Gasification. Who has the process by which algae and bacteria use sunlight to produce hydrogen?</p>	<p>I have Ion. Who has the attraction or bond between two oppositely charged ions?</p>
<p>I have Proton. Who has the neutral subatomic particle in the nucleus of an atom?</p>	<p>I have Microbial Production. Who has a substance or system that moves energy in a usable form from one place to another?</p>	<p>I have Ionic Bond. Who has the chemical bond in which two atoms share electrons?</p>
<p>I have Neutron. Who has the subatomic particle that moves in an orbit outside the nucleus of an atom?</p>	<p>I have Energy Carrier. Who has a device that uses hydrogen fuel to produce electricity, water, and heat?</p>	<p>I have Covalent Bond. Who has the ability to do work?</p>
<p>I have Electron. Who has the name of an area at a precise distance from the nucleus that holds electrons?</p>	<p>I have Fuel Cell. Who has a device that produces electricity through a chemical reaction?</p>	<p>I have Energy. Who has energy sources that are limited and cannot be replenished in a short time?</p>
<p>I have Shell. Who has the form of energy that travels in electromagnetic waves?</p>	<p>I have Electrochemical Energy Conversion Device. Who has a path through which electricity travels?</p>	<p>I have Nonrenewable. Who has energy sources that are unlimited or can be replenished in a short time?</p>
<p>I have Radiant Energy. Who has the process that produces energy in the core of the sun?</p>	<p>I have Circuit. Who has a short name for Polymer Electrolyte Membrane?</p>	<p>I have Renewable. Who has a chemical reaction that absorbs energy?</p>
<p>I have Fusion. Who has the process that uses steam to split methane molecules to produce hydrogen?</p>	<p>I have PEM. Who has the negative side of a fuel cell?</p>	<p>I have Endothermic. Who has the capture and storage of carbon gases?</p>
<p>I have Steam Reforming. Who has the process that splits water into its basic elements of hydrogen and oxygen?</p>	<p>I have Anode. Who has a special material (usually platinum) that facilitates the reaction of hydrogen and oxygen?</p>	<p>I have Carbon Sequestration. Who has the arrangement of elements by their physical and chemical properties?</p>
<p>I have Electrolysis. Who has the method of producing hydrogen using sunlight to split water molecules?</p>	<p>I have Catalyst. Who has the positive side of a fuel cell?</p>	<p>I have Periodic Table. Who has an abundant, clean, domestically available, flexible fuel?</p>

HYDROGEN IN THE ROUND 2

<p>I have Hydrogen. THE END START: Who has the substances organized in the Periodic Table?</p>	<p>I have Photoelectrolysis. Who has a method of producing hydrogen that uses biomass as fuel and feedstock?</p>	<p>I have Cathode. Who has the particle produced when an atom loses or gains an electron?</p>
<p>I have Elements. Who has the subatomic particle in the nucleus that determines the atomic number?</p>	<p>I have Biomass Gasification. Who has an experimental process to produce hydrogen using bacteria and algae?</p>	<p>I have Ion. Who has the chemical bond that cancels the opposing charges of ions?</p>
<p>I have Proton. Who has the subatomic particle that acts as glue to hold the nucleus together?</p>	<p>I have Microbial Production. Who has a system or substance that moves energy efficiently to where it is needed?</p>	<p>I have Ionic Bond. Who has the chemical bond that occurs between nonmetals such as hydrogen and oxygen?</p>
<p>I have Neutron. Who has the subatomic particle that carries a negative charge?</p>	<p>I have Energy Carrier. Who has a device like a battery that uses an external source of fuel to produce electricity, water, and heat?</p>	<p>I have Covalent Bond. Who has the ability to make a change in temperature, position, size, or state of matter?</p>
<p>I have Electron. Who has the precise distance where the two closest electrons are found?</p>	<p>I have Fuel Cell. Who has a battery or fuel cell that produces electricity through a chemical reaction?</p>	<p>I have Energy. Who has coal, natural gas, petroleum, propane, and uranium?</p>
<p>I have Shell. Who has the form of energy that comes from the sun to power photosynthesis?</p>	<p>I have Electrochemical Energy Conversion Device. Who has a closed loop that carries electrical energy?</p>	<p>I have Nonrenewables. Who has wind, solar, geothermal, hydropower, and biomass?</p>
<p>I have Radiant Energy. Who has the process that turns hydrogen into helium, producing radiant energy?</p>	<p>I have Circuit. Who has a membrane that allows hydrogen ions to pass through, but not electrons?</p>	<p>I have Renewables. Who has a chemical process that frees electrons in a battery or voltaic cell?</p>
<p>I have Fusion. Who has the most cost effective method of producing hydrogen fuel today?</p>	<p>I have PEM. Who has the side of a PEM fuel cell through which hydrogen fuel enters?</p>	<p>I have Oxidation. Who has a chemical process that binds free electrons in a battery or voltaic cell?</p>
<p>I have Steam Reforming. Who has a simple method of using electricity to produce very pure hydrogen?</p>	<p>I have Anode. Who has the special material that splits hydrogen gas into hydrogen ions and electrons?</p>	<p>I have Reduction. Who has the system of organizing all of the known elements?</p>
<p>I have Electrolysis. Who has an experimental method of producing hydrogen using a semiconductor to absorb sunlight?</p>	<p>I have Catalyst. Who has the side of a fuel cell with channels to distribute oxygen to the catalyst?</p>	<p>I have Periodic Table. Who has a clean fuel that can be produced by steam reforming and electrolysis?</p>

H Y D R O G E N S U R V E Y ‡

1. The average American uses how much energy compared to the average world citizen?
a. half as much b. twice as much c. six times as much d. twenty times as much
2. What percentage of U.S. energy consumption is from renewable energy sources?
a. 1 % b. 6 % c. 12 % d. 24 %
3. How much of total petroleum consumption does the United States import from foreign countries?
a. > 10 % b. > 25 % c. > 50 % d. < 50 %
4. How much of total U.S. energy consumption is used by the transportation sector of the economy?
a. 7 % b. 17 % c. 27 % d. 47 %
5. An ideal energy system would...
a. include domestic and imported energy sources.
b. use only nonrenewable energy sources.
c. use a variety of energy sources.
d. All of the above
6. Hydrogen is one of the most abundant elements in the universe. True False
7. Hydrogen gas is abundant in underground reservoirs on Earth. True False
8. Hydrogen fuel can be produced from...
a. water. b. natural gas. c. biomass. d. All three
9. Hydrogen can be used...
a. as a vehicle fuel.
b. to produce electricity.
c. Both a and b
d. Neither a nor b
10. Electrolysis is a process in which electricity is used to...
a. turn water into steam.
b. combine hydrogen and oxygen molecules to make water.
c. split water molecules into hydrogen and oxygen gases.
d. produce light and heat.
11. A fuel cell...
a. produces electricity.
b. uses hydrogen as fuel.
c. emits only water and heat.
d. All of the above
12. A fuel cell must be replaced often, like a non-rechargeable battery. True False
13. Hydrogen can be transported as a liquid or a gas. True False
14. Hydrogen is as safe as gasoline or diesel fuel when handled properly. True False
15. Hydrogen could meet many of our energy needs in the future. True False

LAB SAFETY RULES‡

EYE SAFETY‡

Always wear safety glasses when conducting experiments.

FIRE SAFETY‡

Do not heat any substance or piece of equipment unless specifically instructed to do so.

Be careful of loose clothing. Do not reach across or over a flame.

Always keep long hair pulled back and secured.

Do not heat any substance in a closed container.

Always use the tongs or protective gloves when handling hot objects. Do not touch hot objects with your hands.

Keep all lab equipment, chemicals, papers, and personal effects away from a flame.

Extinguish a flame as soon as you are finished with the experiment and move it away from the immediate work area.

HEAT SAFETY‡

Always use tongs or protective gloves when handling hot objects and substances.

Keep hot objects away from the edge of the lab table—in a place where no one will accidentally come into contact with them.

Do not use the steam generator without the assistance of your teacher.

Remember that many objects will remain hot for a long time after the heat source is removed or turned off.

GLASS SAFETY‡

Never use a piece of glass equipment that appears cracked or broken.

Handle glass equipment carefully. If a piece of glassware breaks, do not attempt to clean it up yourself. Inform your teacher.

Glass equipment can become very hot. Use tongs if glass has been heated.

Clean glass equipment carefully before packing it away.

CHEMICAL SAFETY‡

Do not smell, touch, or taste chemicals unless instructed to do so.

Keep chemical containers closed except when using them.

Do not mix chemicals without specific instructions.

Do not shake or heat chemicals without specific instructions.

Dispose of used chemicals as instructed. Do not pour chemicals back into container without specific instructions to do so.

If a chemical accidentally touches you, immediately wash the area with water and inform your teacher.

H₂E²Educate Evaluation Form

Please let us know what worked well with your class, what didn't, and how we can revise the unit to make it better.

State: _____ Grade Level: _____ Number of Students: _____

- | | | | |
|-----|---|-----|----|
| 1. | Did you conduct the entire unit? | Yes | No |
| 2. | Were the instructions clear and easy to follow? | Yes | No |
| 3. | Did the unit meet your academic objectives? | Yes | No |
| 4. | Were the activities age appropriate? | Yes | No |
| 5. | Were the allotted times sufficient to conduct the activities? | Yes | No |
| 6. | Was the kit easy to use? | Yes | No |
| 7. | Was the preparation time acceptable for the unit? | Yes | No |
| 8. | Were the students interested and motivated? | Yes | No |
| 9. | Was the reading level age appropriate? | Yes | No |
| 10. | Would you use the unit again? | Yes | No |

How would you rate the unit overall?

How would your students rate the unit overall?

What would make the unit more useful to you?

Additions/Suggestions/Comments:

Please fax or mail to:

The NEED Project
PO Box 10101
Manassas, VA 20108

FAX: 1-800-847-1820

NEED National Sponsors and Partners

Alabama Department of Economic and Community Affairs

American Association of Blacks in Energy
Detroit Chapter

American Association of Drilling Engineers
Houston Chapter

American Electric Power

American Petroleum Institute
Houston Chapter

Association of Desk & Derrick Clubs

Arkansas Energy Office

BJ Services Company
BP

Bureau of Land Management
U.S. Department of the Interior

Cape and Islands Self Reliance

Cape Cod Cooperative Extension

Cape Light Compact

ChevronTexaco

Cinergy Corporation

Dart Container Corporation Foundation

Dominion

Energy Information Administration
U.S. Department of Energy

Equitable Resources

FMC Technologies

Florida State Energy Office

Florida Department of Environmental Protection

GlobalSantaFe

Guam Energy Office

Governors Ethanol Coalition

Halliburton Foundation

Hydril

Hydro Research Foundation

Illinois Clean Energy Community Foundation

Illinois Department of Commerce
and Economic Opportunity

Independent Petroleum Association of NM

Indiana Division of Family & Children, Housing
and Community Services

Indiana Department of Commerce
Energy Policy Division

Indiana Community Action Association

Interstate Renewable Energy Council

Johnson Controls

Kentucky Clean Fuels Coalition

Kentucky Coal Council

Kentucky Division of Energy

Kentucky Oil and Gas Association

Kentucky Propane Education & Research Council

Kentucky River Properties LLC

Lee Matherne Family Foundation

Llano Land and Exploration

Maine Energy Education Project

Maine Public Service Company

Marathon Oil Company

Massachusetts Division of Energy Resources

Michigan Energy Office

Michigan Oil & Gas Association

Minerals Management Service

U.S. Department of the Interior

Mississippi Development Authority—Energy Division

Narragansett Electric—A National Grid Company

National Association of State Energy Officials

National Biodiesel Board

National Ocean Industries Association

National Renewable Energy Laboratory

Nebraska Public Power District

NC Department of Administration
State Energy Office

New York State Energy Research
and Development Authority

Offshore Energy Center/Ocean Star/OEC Society

Ohio Energy Project

Oil & Gas Rental Services

Paragon Engineering

Premiere

Roanoke Gas

Rhode Island State Energy Office

Saudi Aramco

Schlumberger

Shell Exploration and Production

Southwest Gas

Tennessee Department of Economic and Community
Development

Texas Independent Producers & Royalty Owners
Association

Union Light, Heat & Power

U.S. Department of Energy

Venoco Inc.

Virgin Islands Energy Office

Xcel Energy