

# HIGH EFFICIENCY GENERATION OF HYDROGEN FUELS USING NUCLEAR ENERGY

A Nuclear Energy Research Initiative (NERI) Project  
for the U.S. Department of Energy

by


L. C. Brown, G. E. Besenbruch, General Atomics

J. E. Funk, University of Kentucky

A.C. Marshall, P.S. Pickard, S.K. Showalter, Sandia National Laboratories

summarized by  
Ken Schultz, General Atomics

for the  
Hydrogen and Fuel Cells Annual Review  
6 May 2002

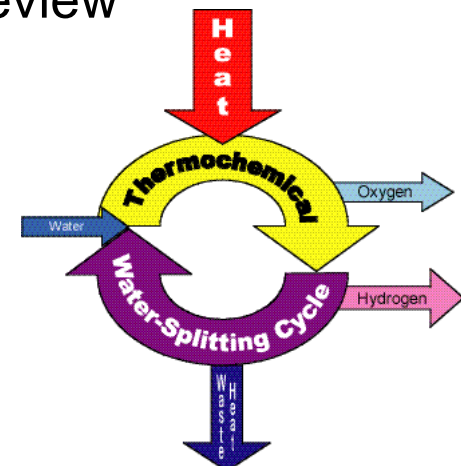

# **The Hydrogen Economy will require clean energy**

---

- **Hydrogen is an energy carrier, not an energy source**
- **A Hydrogen Economy only makes sense if hydrogen is produced with non-fossil, non-greenhouse gas energy**
- **Our options for clean energy are very limited**
  - **Nuclear (Fission, Fusion)**
  - **Solar (Solar thermal, Photovoltaic)**
  - **Renewables (Hydropower, Geothermal, Wind, Biomass)**

**Nuclear power can provide that energy**

# How can we get hydrogen from nuclear energy?

---

- **Electric power generation – Electrolysis**
  - Overall efficiency approximately **25-30%**  
(efficiency of electric power generation x efficiency of electrolysis)
  - Higher temperature reactors can lead to higher efficiency, **~35-40%**
- **Heat – Thermochemical water-splitting**
  - A thermochemical water-splitting cycle is a set of chemical reactions that sum to the decomposition of water into hydrogen and oxygen
  - Energy is input via endothermic high temperature chemical reactions, rejected via exothermic low temperature chemical reactions
  - Splits water at moderate temperatures (~700-900°C vs ~5,000°C for thermolysis)
  - Plant efficiencies of **~50%**
- **Electricity/Heat – High temperature electrolysis or Hybrid thermochemical water-splitting**
  - Efficiencies of **~40%**

**The choice will depend on overall economics**

# NERI is searching for an economical path to hydrogen production with nuclear power

---


- Objective of our Project: “Define an economically feasible concept for the production of hydrogen, by nuclear means, using an advanced high temperature nuclear reactor as the energy source.”
- Tasks for 3 year, \$1.6M study: **Team: SNL, UoK, GA**
  - Carry out extensive literature review to identify candidate thermochemical water-splitting cycles (All)
  - Develop and apply screening criteria to identify most promising cycles and to select one for detailed analysis (All)
  - Evaluate candidate nuclear reactors, select most promising options and select one for use in the chemical cycle analysis (SNL)
  - Develop detailed chemical flowsheet for selected process and determine projected process efficiency (UoK, GA)
  - Estimate the size and cost of the process equipment (All)

## Literature survey located 822 references and 115 cycles

- Literature database will be available on the Internet
- Go-No go feasibility and ES&H criteria were applied
- Quantifiable screening criteria were developed and each cycle was given a numerical score


### Screening reducing the number of cycles to 25

- Detailed investigations were made of each cycle
  - Thermodynamic calculations
  - Preliminary block flow diagrams
- Two cycles stood out as well-suited for coupling to nuclear energy: Adiabatic UT-3 cycle and Sulfur-Iodine cycle

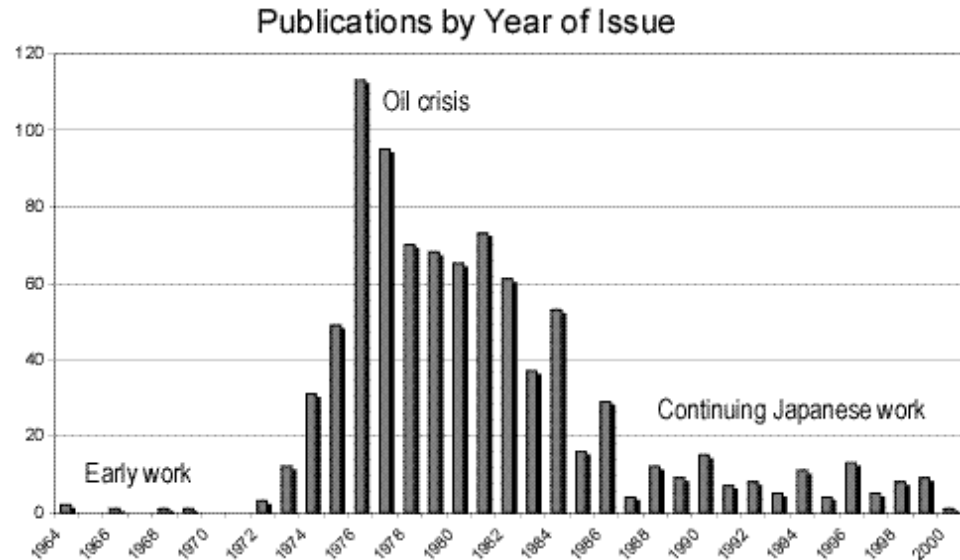

### Detailed evaluation yielded 2 cycles

# The adiabatic UT-3 process is conceptually simple. . .

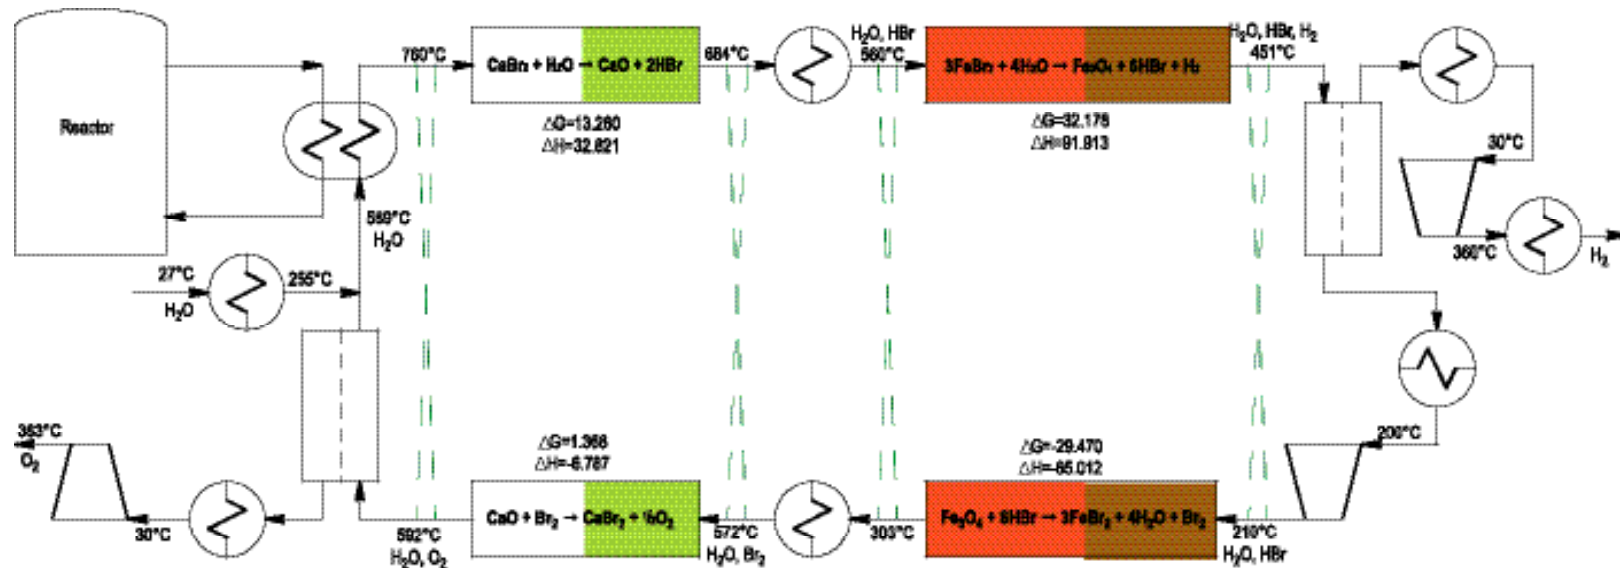


- Invented at Univ. of Tokyo, being pursued in Japan, SI cycle is backup
  - Chemistry demonstrated in pilot plant
  - Requires 760°C, 40% efficiency predicted, 45-49% with high T co-generation
- Four gas solid reactions in stationary beds ( $\text{CaBr}_2 \leftrightarrow \text{CaO}$ ,  $\text{FeBr}_2 \leftrightarrow \text{Fe}_3\text{O}_4$ )
- Challenges:
  - $\text{H}_2$  and  $\text{O}_2$  removed via membranes – possible scale-up difficulties
  - $\text{H}_2$  and  $\text{O}_2$  produced at subatmospheric pressures, must be compressed
  - Lower efficiency and possible solid attrition in non-steady state operation
  - Limited potential for improvement – already at melting point of  $\text{CaBr}_2$

. . . but requires development


# The Sulfur-Iodine cycle is an all-liquid/gas process. . .

- Invented at GA in 1970s
  - Serious laboratory investigations done for nuclear and solar
- Advantages:
  - All fluid continuous process, chemicals all recycled; no effluents
  - Chemistry reactions all demonstrated
  - Highest efficiency quoted for any water-splitting process, 52%
  - Improvements have been identified for still higher efficiency, lower cost
- Challenges:
  - Requires high temperature,  $\geq 800^{\circ}\text{C}$
  - Must be demonstrated as an integrated closed loop cycle
  - Process cost and economics must be verified
- The S-I cycle could make  $\text{H}_2$  at 45-55% efficiency and co-produce  $\text{H}_2$  and electricity at over 60%

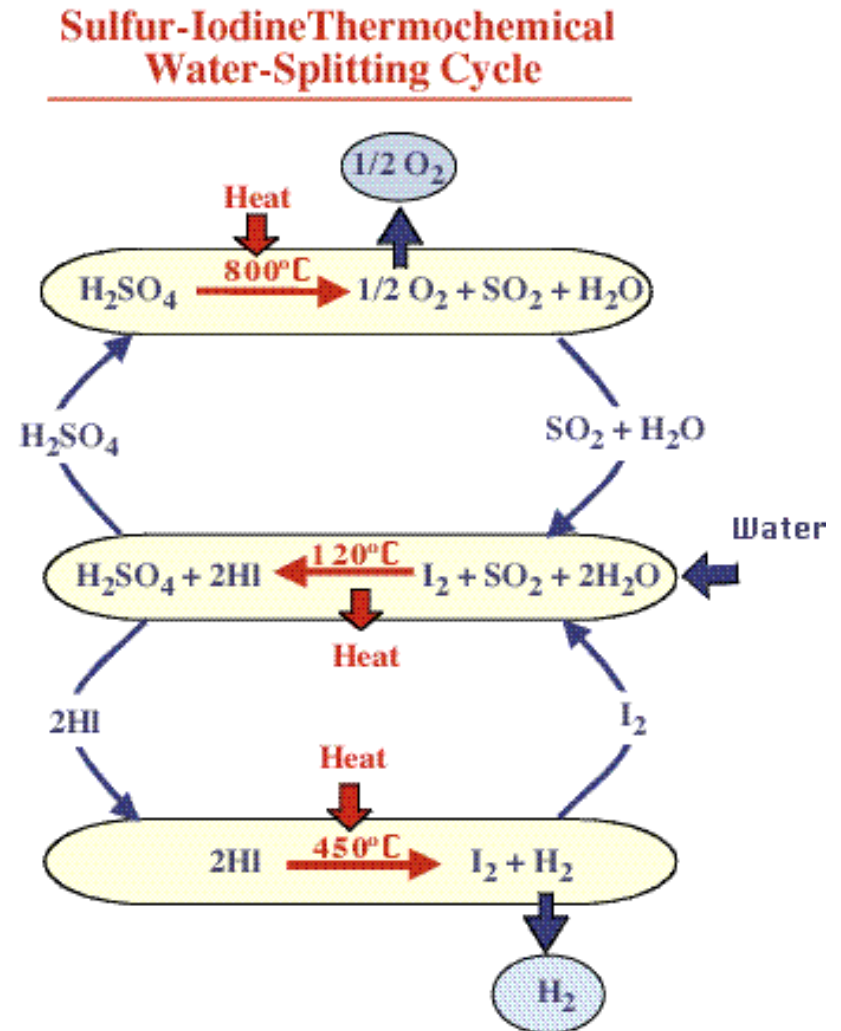

. . . and has the potential to produce low cost hydrogen

# The Sulfur-Iodine cycle . . .

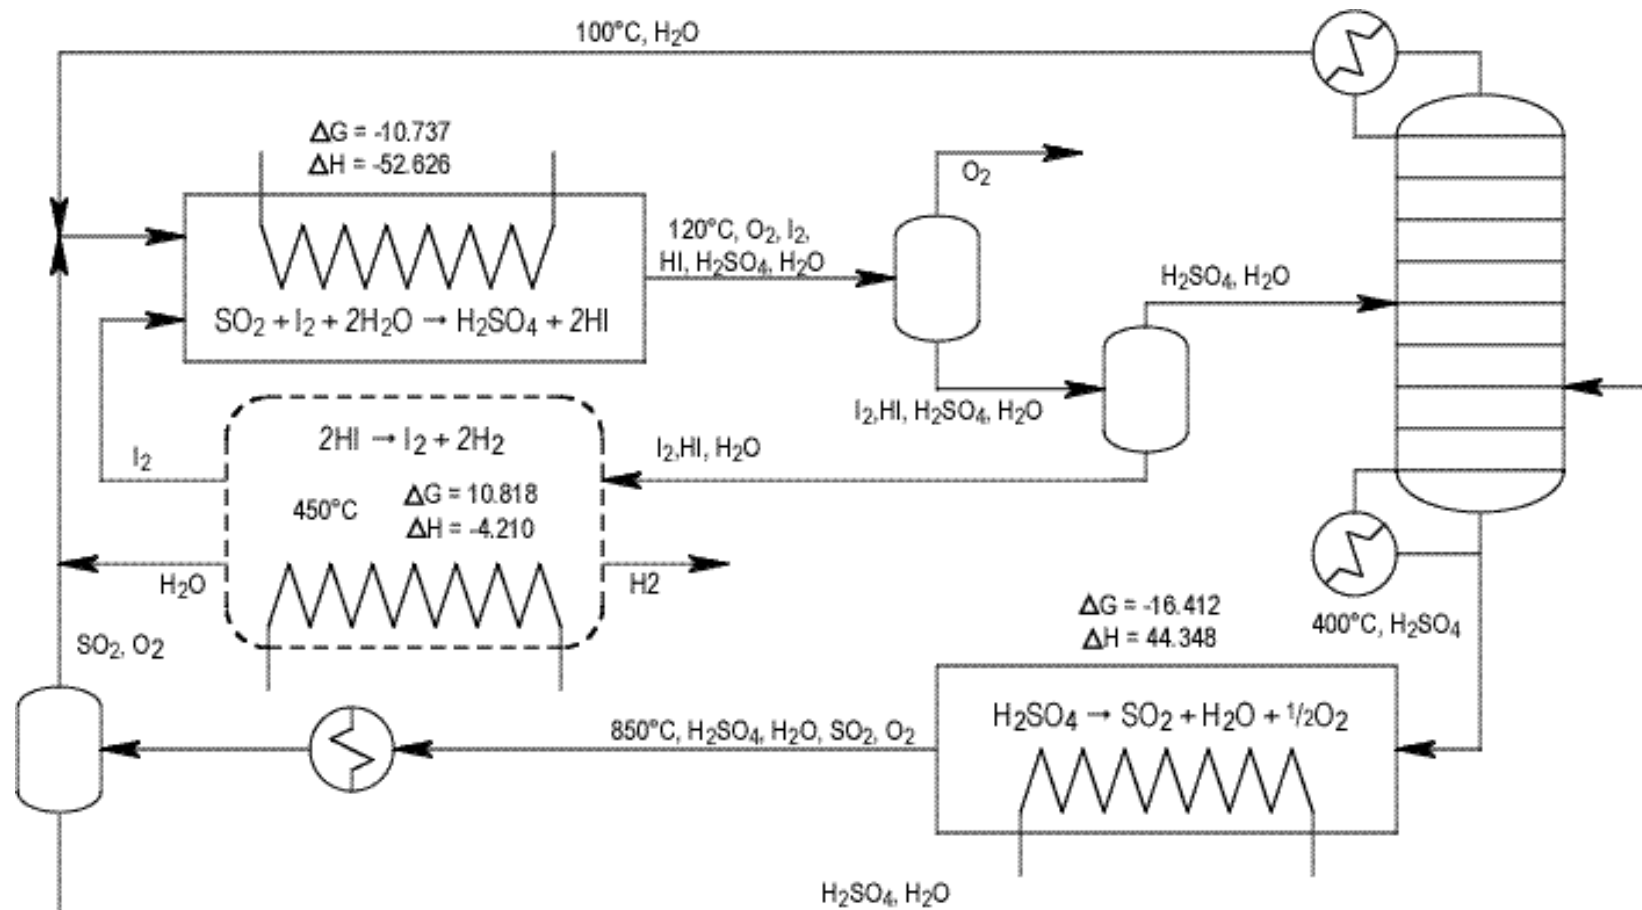

. . . is an all fluid process and was chosen for our work

## SNL evaluated candidate reactors

---

- **Considered 9 categories of reactors:**
  - Pressurized water-cooled, Boiling water-cooled, Organic-cooled, Alkali metal-cooled, Heavy metal-cooled, Gas-cooled, Molten salt-cooled, Liquid-core and Gas-core
- **Assessed reactor features for interface with SI cycle against 5 requirements and 5 criteria, and considered relative development requirements**
- **Three reactor types are suitable for thermochemical hydrogen production**
  - Helium Gas Cooled Reactor
    - Superior – Demonstrated temperature capability
  - Heavy Metal Cooled Reactor (Lead-Bismuth)
    - Probably adequate with sufficient development
  - Molten Salt Cooled Reactor
    - Probably adequate with sufficient development

**... and recommended helium gas-cooled reactors**

## The flowsheet design of the SI process will be completed in July '02

---


- Used chemical process design code Aspen Plus
- Evaluated available thermodynamic data, evaluated and improved thermodynamic models, contacting US and foreign researchers interested in thermochemical hydrogen production
- Designed the three main chemical process systems
  - Prime reaction ( $2\text{H}_2\text{O} + \text{SO}_2 + \text{I}_2 \rightarrow \text{H}_2\text{SO}_4 + 2\text{HI}$ )
  - Sulfuric acid concentration and decomposition ( $2\text{H}_2\text{SO}_4 \rightarrow 2\text{SO}_2 + 2\text{H}_2\text{O} + \text{O}_2$ )
  - Hydrogen iodide concentration and decomposition ( $2\text{HI} \rightarrow \text{I}_2 + \text{H}_2$ )
- Additional chemical data will improve efficiency and cost
  - Sulfuric acid thermodynamics at high concentrations
  - Iodine systems equilibrium thermodynamics
  - Better data will allow a more efficient design

**Additional experimental data — chemical properties and integrated loop operation —required before construction**

# **The Modular Helium Reactor solves the problems of first generation reactors**

- High temperature ceramic fuel is passively safe
- Allows high coolant temperatures - 850 - 950°C
- Coupled to gas turbine: GT-MHR, 48% efficiency
- Coupled to water-splitting cycle: Hydrogen at 50%
- Reduces cost and minimizes waste
- Proliferation resistant due to hard neutron spectrum

**... Opens a new opportunity for nuclear power**

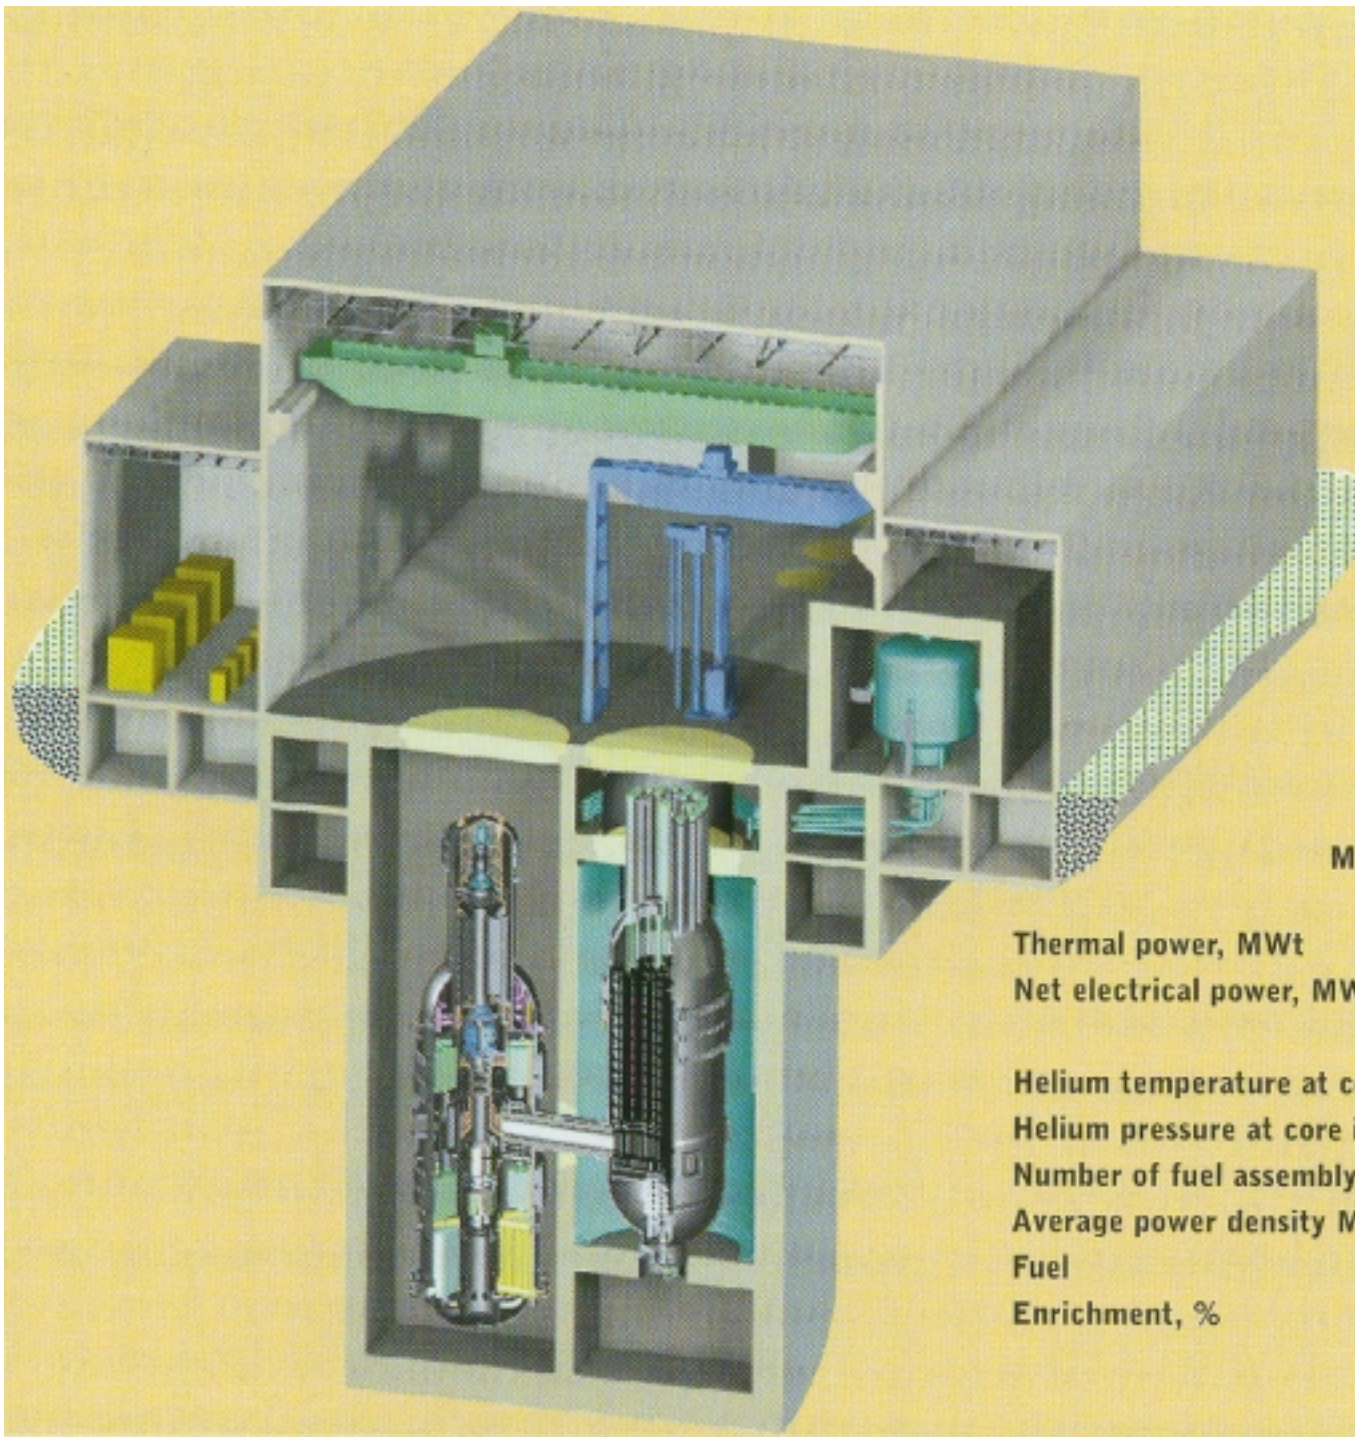


## GT-MHR module arrangement

### Main technical data


Thermal power, MWt	600
Net electrical power, MWe	280
Helium temperature at core inlet/outlet, °C	488/850
Helium pressure at core inlet, MPa	7,15
Number of fuel assembly, columns	102
Average power density MWt/m <sup>3</sup>	6,5
Fuel	UO <sub>2</sub>
Enrichment, %	20

# MHR builds on 40 years of progress

This is the foundation for today's opportunity.

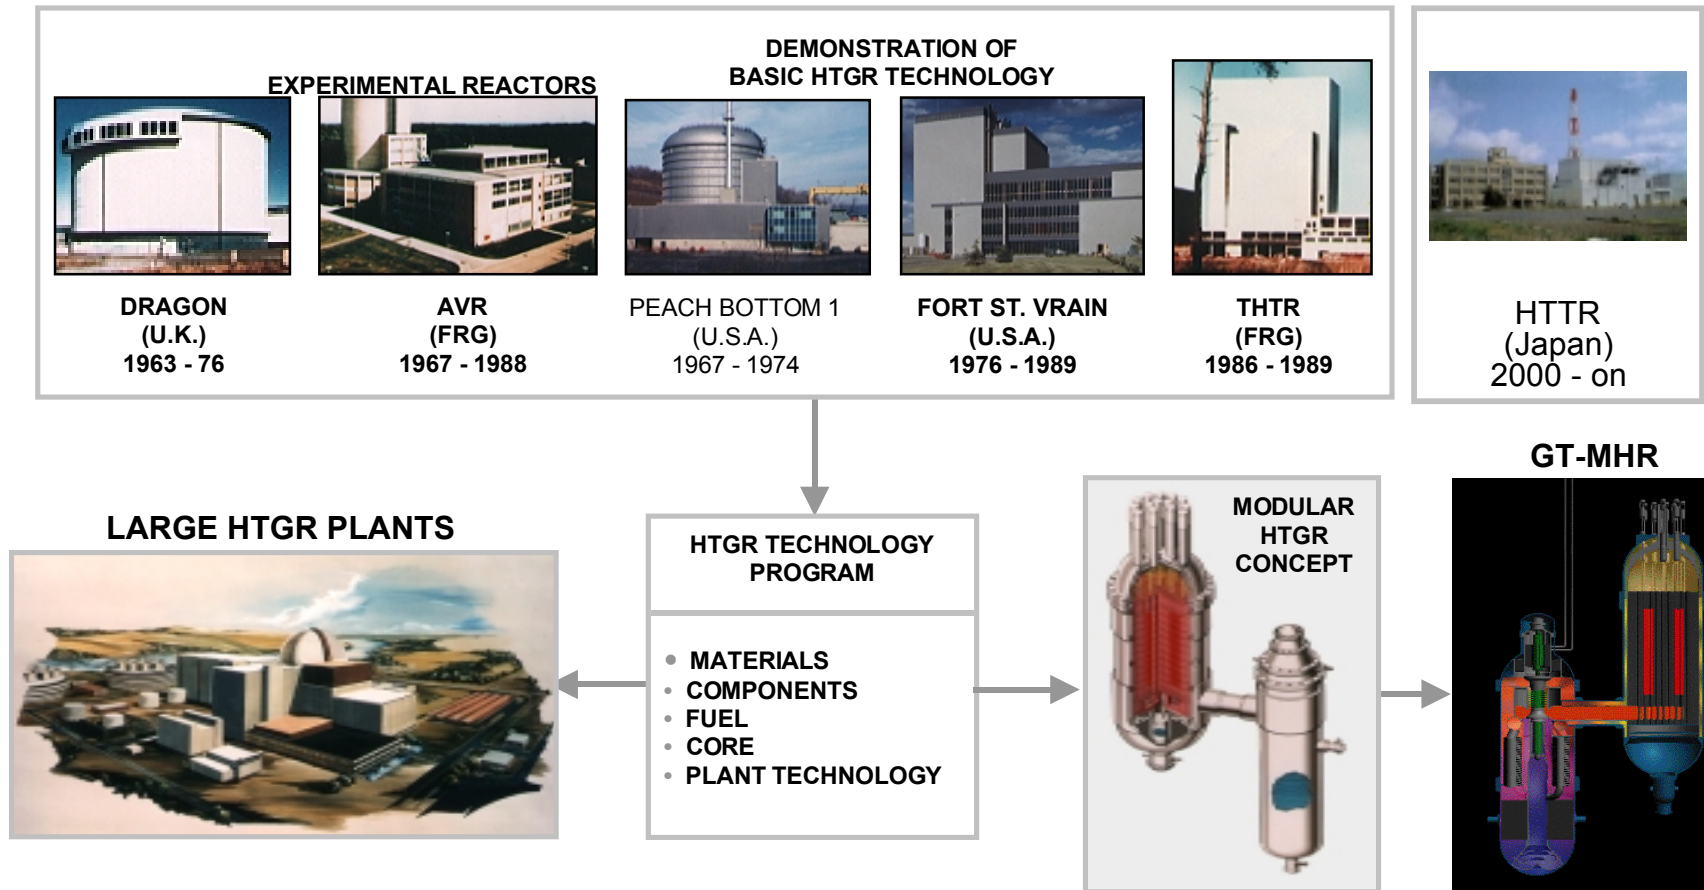


# FUEL TEMPERATURES REMAIN BELOW DESIGN LIMITS DURING LOSS OF COOLING EVENTS

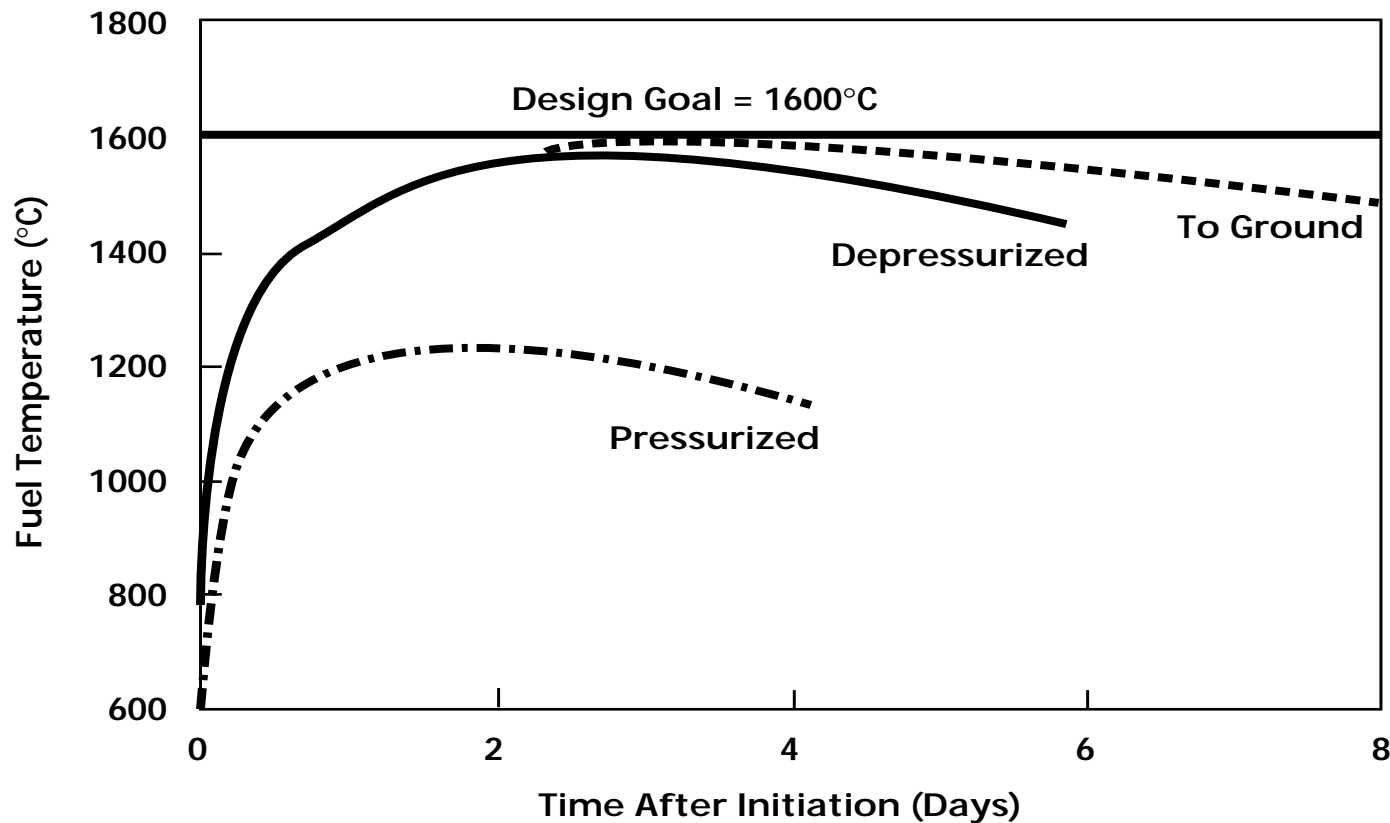

**... PASSIVE DESIGN FEATURES ENSURE FUEL REMAINS BELOW 1600°C**




# TRISO fuel particles are highly engineered

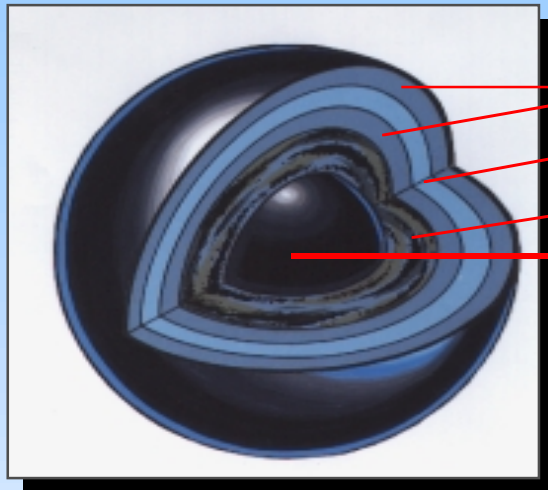

Pyrolytic Carbon  
Silicon Carbide  
Porous Carbon Buffer  
Uranium Oxide ( $\text{UO}_2$ )

} TRISO Coating

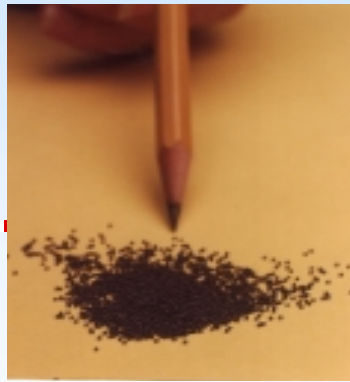

**PARTICLES**






**COMPACTS**



**FUEL ELEMENTS**

TRISO Coatings and Graphite are Excellent Engineered Barriers for Normal Operation, Severe Accidents, and Permanent Disposal

# GT-MHR OFFERS MAJOR ENVIRONMENTAL BENEFITS

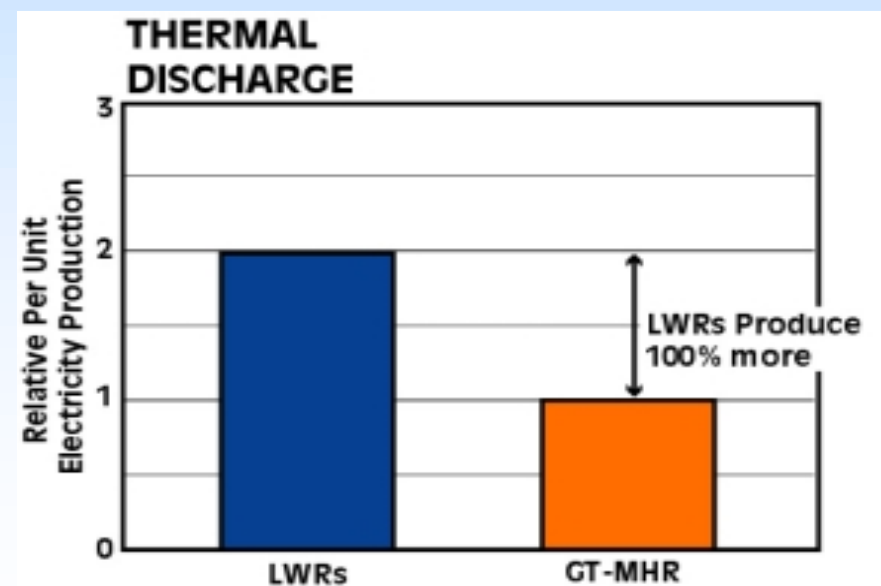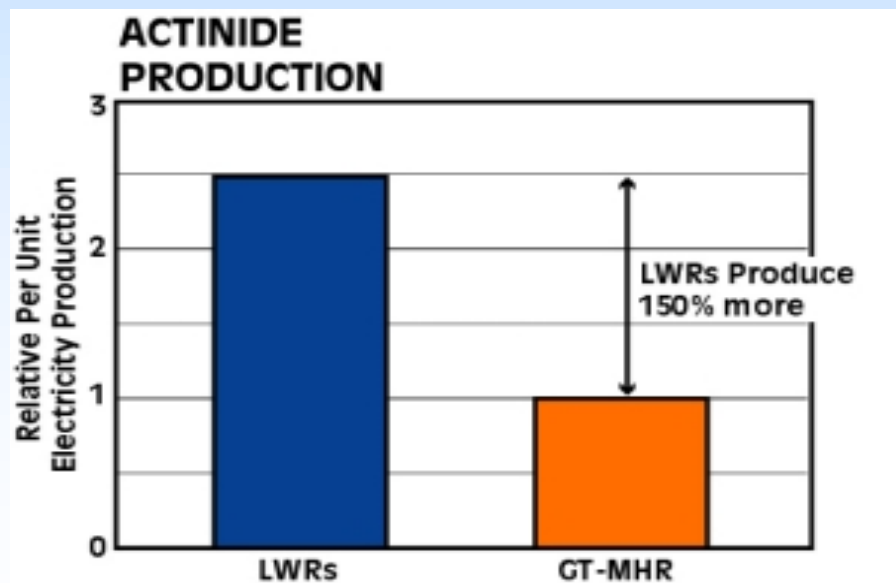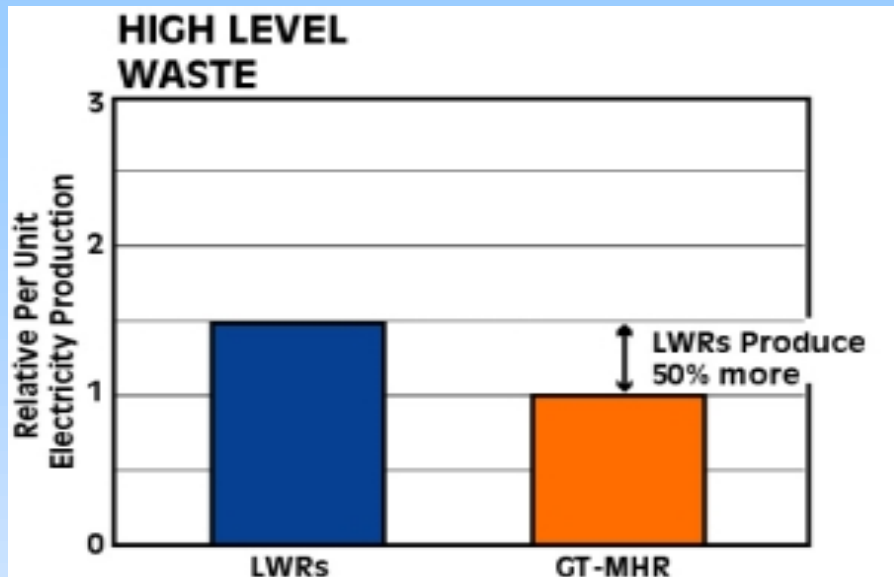


# GA supported San Diego State University to develop economic models for nuclear production of hydrogen

NH<sub>2</sub>

Nuclear Hydrogen



- Modest effort, internally funded
- Provided MBA project for SDSU students
- Very positive interactions with Stuart Energy, leading developer of H<sub>2</sub> electrolysis units
- Initial Effort:
  - Develop simple economic models
  - Compare GT-MHR + Electrolysis with SI-MHR production of H<sub>2</sub>
  - Provide a tool for preliminary parametric surveys

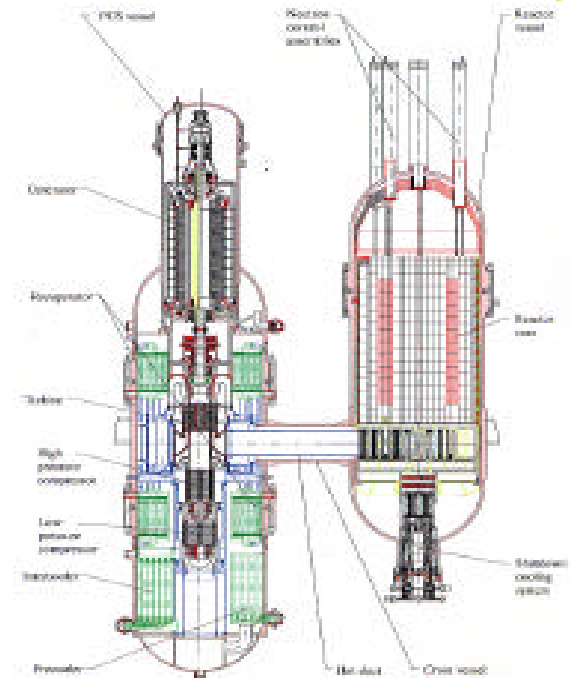


# We have 2 models of H<sub>2</sub> production


NH2  
Nuclear Hydrogen



## GT-MHR + Electrolysis

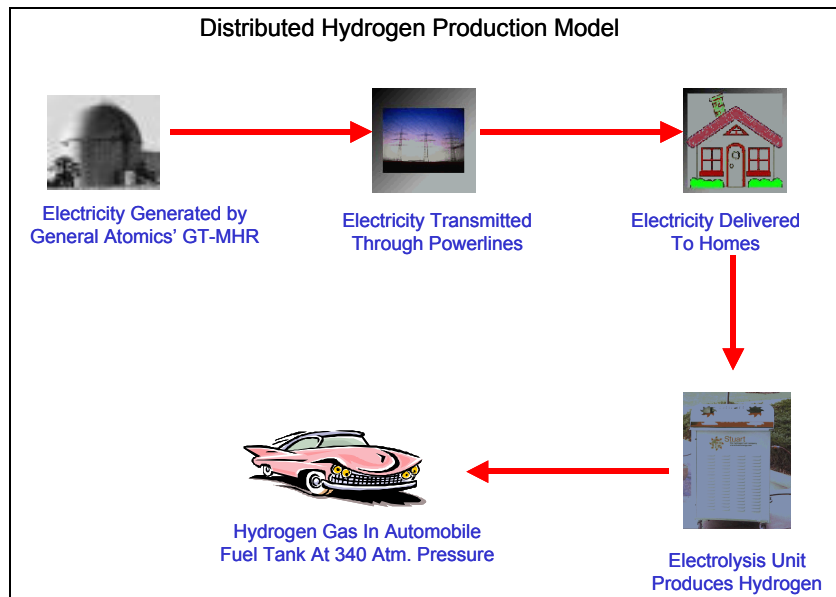

## MHR + SI Cycle

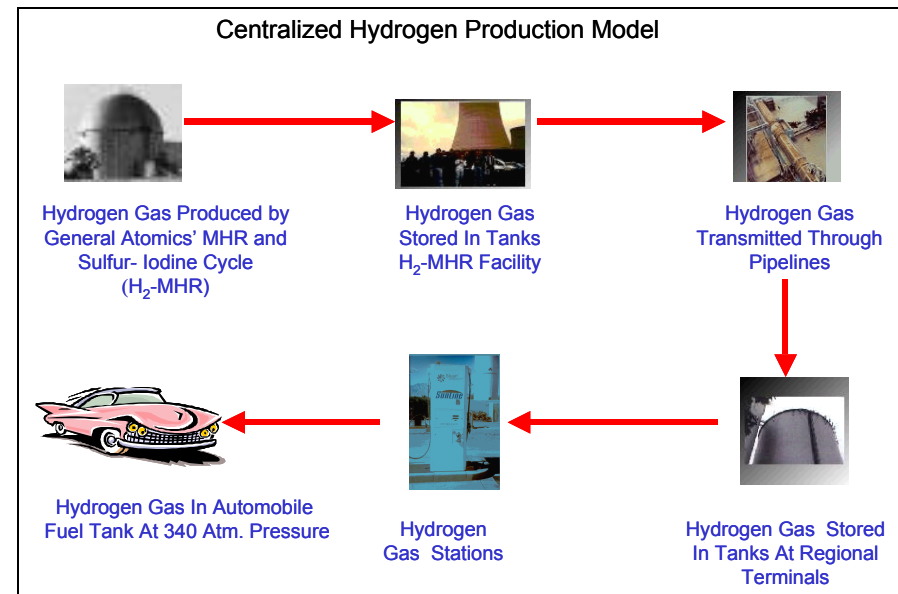

# Economic assumptions span a wide range

**NH<sub>2</sub>**  
Nuclear Hydrogen



Description	GT-MHR	MHR alone	SI-H <sub>2</sub> Cycle	H <sub>2</sub> -MHR
<b>Total Overnight Cost, \$M</b>	<b>1,290</b>	<b>968</b>	<b>504 - 1,008</b>	<b>1,472 - 1,976</b>
	(\$1120/kWe)		(\$210-420/kWt)	
<b>Operating Cost, \$M/year</b>	<b>127</b>	<b>95.3</b>	<b>33.6 - 67.2</b>	<b>128.9 - 162.5</b>
<b>Efficiency — production</b>	<b>48%</b>			<b>40 - 60%</b>
<b>— electrolysis</b>	<b>65 - 95%</b>			
<b>Electrolysis Unit Cost</b>	<b>\$288M–1.2B</b>			
	(\$250-1000/kWe)			
<b>Electricity Distribution Cost Multiplier</b>	<b>1.0 - 3.0</b>			
<b>Capital Recovery Rate</b>	<b>5 - 20%</b>	<b>5 - 20%</b>	<b>5 - 20%</b>	<b>5 - 20%</b>
<b>Transmission distance</b>	<b>0-1000 mi</b>			<b>0-1000 mi</b>

**Intent: Use model parametrically**



# Example of Busbar H<sub>2</sub> Cost Estimates


NH<sub>2</sub>

Nuclear Hydrogen



Assume median SI H<sub>2</sub> system cost (\$315/kWt) and efficiency (50%)

Electrolysis at Stuart Energy goal of \$250/kWe

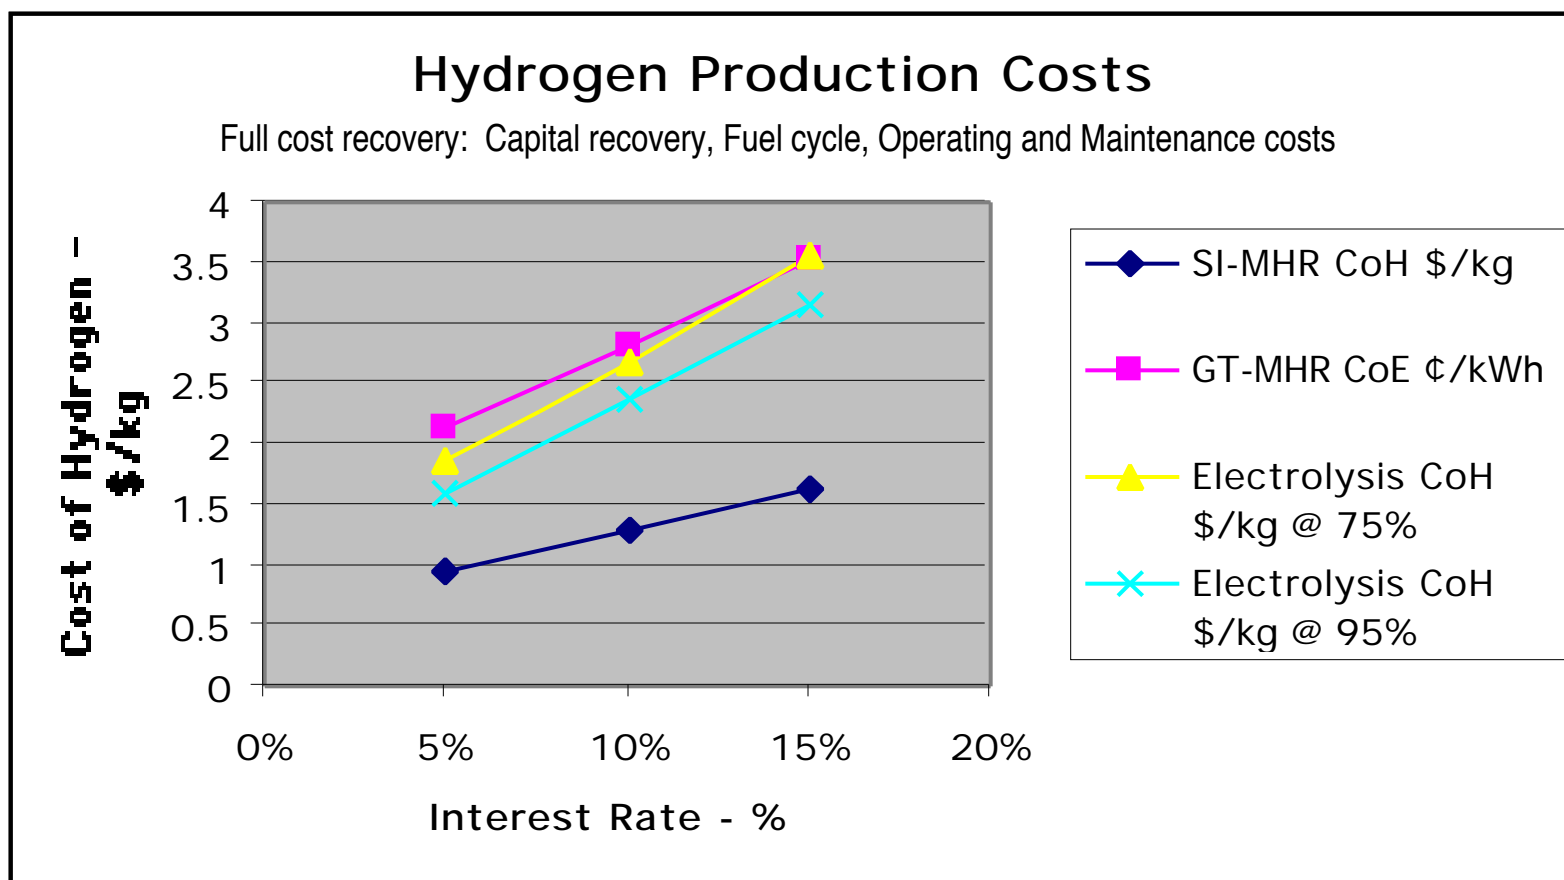

# Nuclear Production of H<sub>2</sub> Appears Attractive

NH2  
Nuclear Hydrogen



- Our NERI study team identified attractive water-splitting cycle and nuclear reactor candidates
  - Chose Sulfur-Iodine cycle and gas-cooled reactor
- Complete flowsheet design and cost estimate will be done in July
- We expect high efficiency and low H<sub>2</sub> cost

# Effort will be needed to achieve economic hydrogen from nuclear energy...

NH<sub>2</sub>  
Nuclear Hydrogen



- **The first steps are**
  - Demonstrate integrated SI loop operation
    - Follow-on NERI proposal to DOE/NE for part of this
    - Are there alternate sources?
  - Measure needed chemical data (useful for any heat source)
    - University or Lab task?
- **Next proceed with a Pilot Plant**
  - Initial operation with simulated nuclear heat source
  - Then move to a nuclear heat source (NP-2010?)
- **Then build a H<sub>2</sub>-producing Nuclear Demo Plant**
  - NP-2010 could be this demonstration

**... but the path forward appears clear**