



... for a brighter future

PHEVs Component Requirements

DOE Merit Review
28 February, 2008

P. Sharer, J. Kwon, S. Pagerit, A. Rousseau
Argonne National Laboratory
Sponsored by Lee Slezak



U.S. Department
of Energy

UChicago ►
Argonne_{LLC}



A U.S. Department of Energy laboratory
managed by UChicago Argonne, LLC



U.S. Department of Energy
Energy Efficiency and Renewable Energy

Bringing you a prosperous future where energy is clean, abundant, reliable, and affordable

"This presentation does not contain any proprietary or confidential information"

Define PHEVs Component Requirements

Component Data
from R&D Teams


Battery



Testing



Model




Electric Machine

2004 Prius



Accessories

Camry A/C Power



Prius A/C Power




PSAT
Simulations

Vehicle Classes

Sizing & Simulation

Vehicle
Requirements



Results
Shared with
R&D Teams

Validation

Battery RCP




JCS VL41M



Vehicle Testing




Optimum Battery Power and Energy Defined for Several Vehicle Platforms and AER

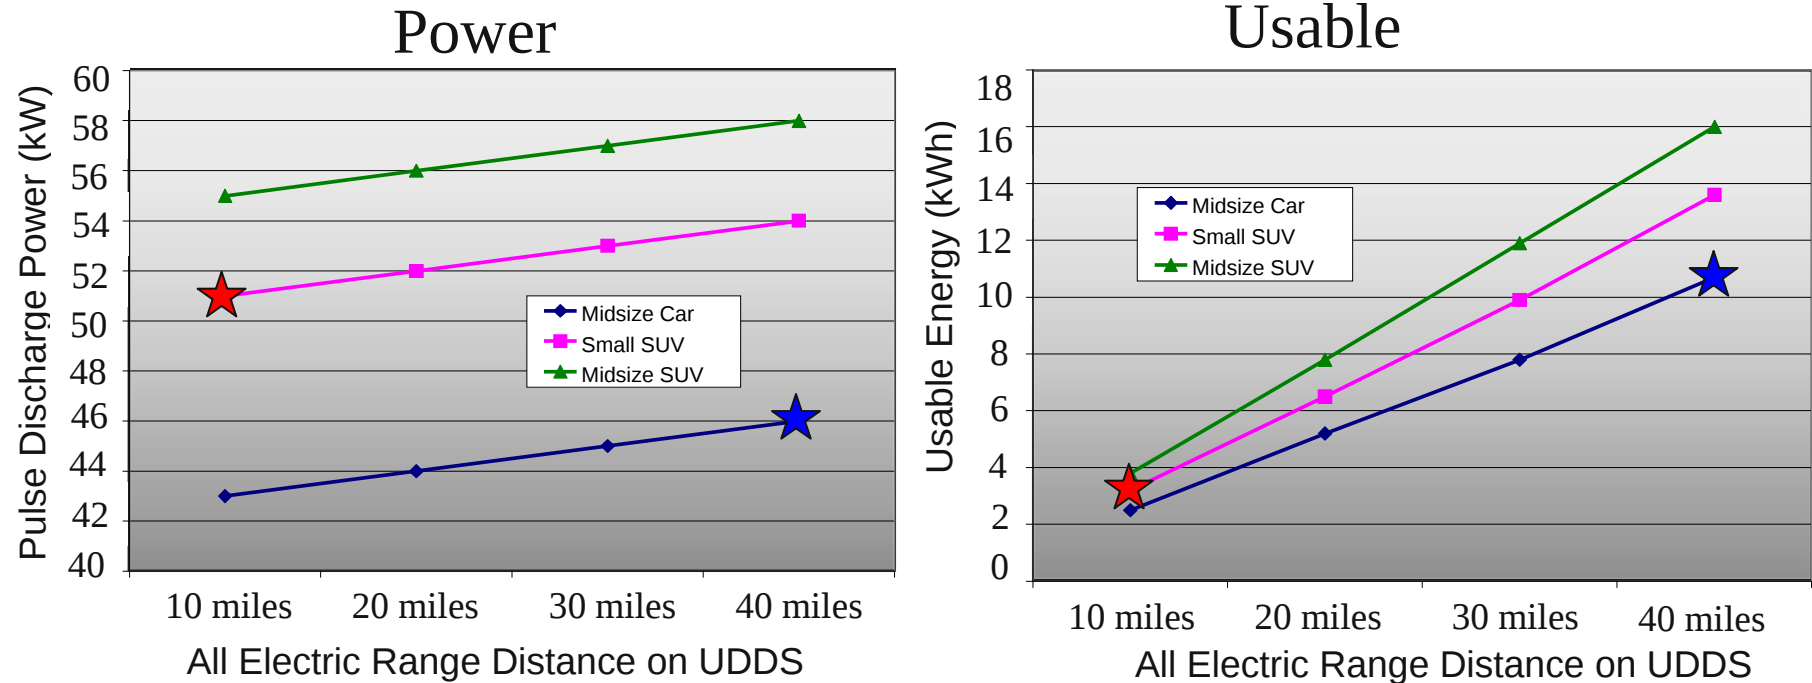

Final values selected by the ESS Tech Team

- Short term 10 miles AER (3.4 kWh, 50 kW) ★
- Long term 40 miles AER (11.6 kWh, 46 kW) ★

Electric Machine Power Required within FreedomCAR Target

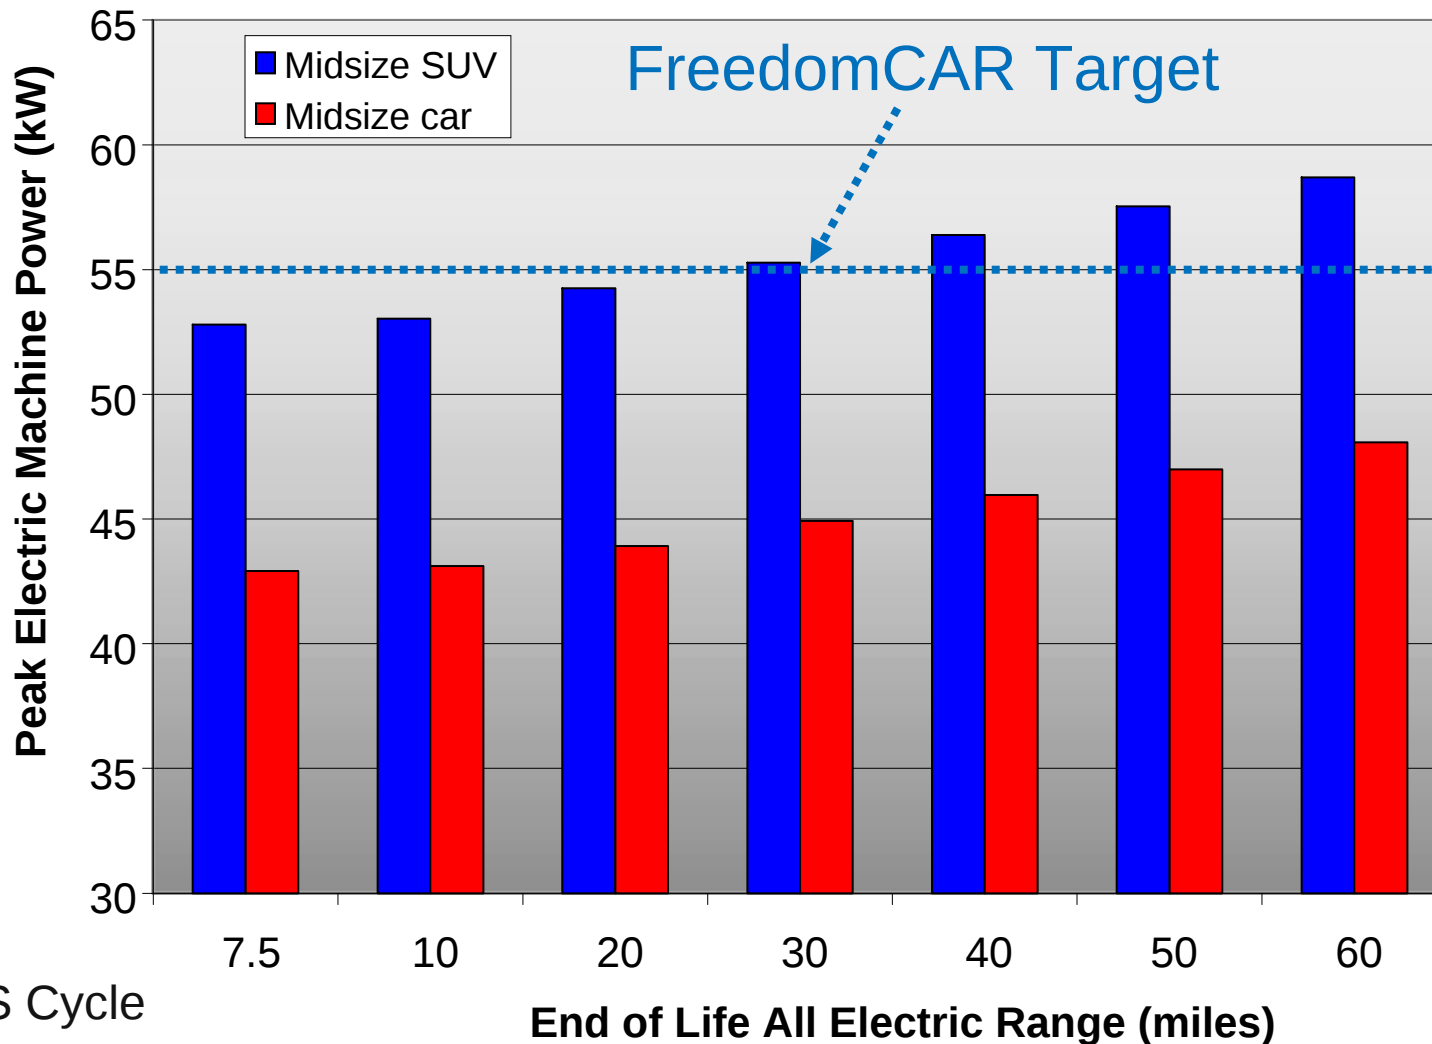

UDDS Cycle

Evaluate PHEV Component Requirements Uncertainties

- FY08 Budget \$400K, \$100K spent to date

- **Objective:**

- How does each assumption influence the requirements?
- Can we lower a requirement without significant fuel economy loss?

- **Current Status:**

- Gathered additional information on current vehicle characteristics
- Review and updated sizing algorithm logic

Main Assumption Uncertainties Considered in Future Studies

Performance

Acceleration



Gradeability



Towing



Vehicle Technologies


Glider
Mass




Drag
Coefficient



Components

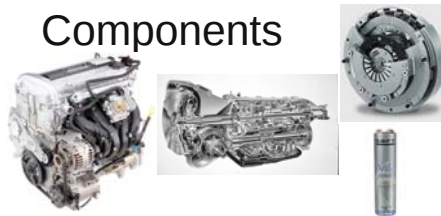


Air Conditioning




Powertrain Configurations

2Mode

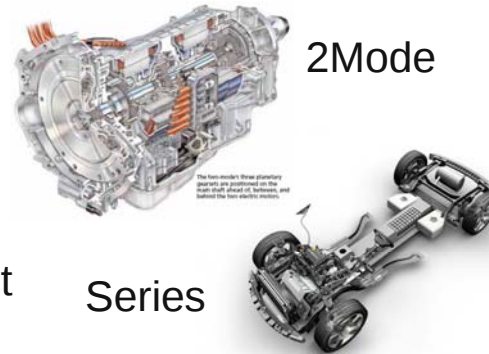

Series

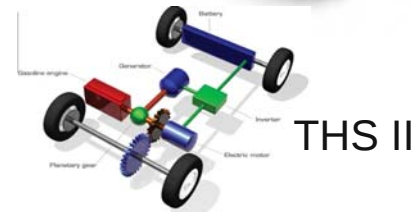


THS II




Parallel

Drive Cycles


US Standards

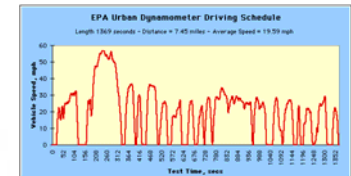

Other Standards




Real World



PSAT Simulation Results Provide Guidance for DOE R&D Component Development

- Collaboration with the different R&D Teams led to
 - Preliminary component requirements
 - Request For Proposals (RFP) for advanced high-performance battery development issued by USABC
- Current and future research focuses on assessing component requirement uncertainties
 - Performance requirements
 - Component technology
 - Powertrain configuration
 - Drive cycles...
- Define trade-offs between cost and performance

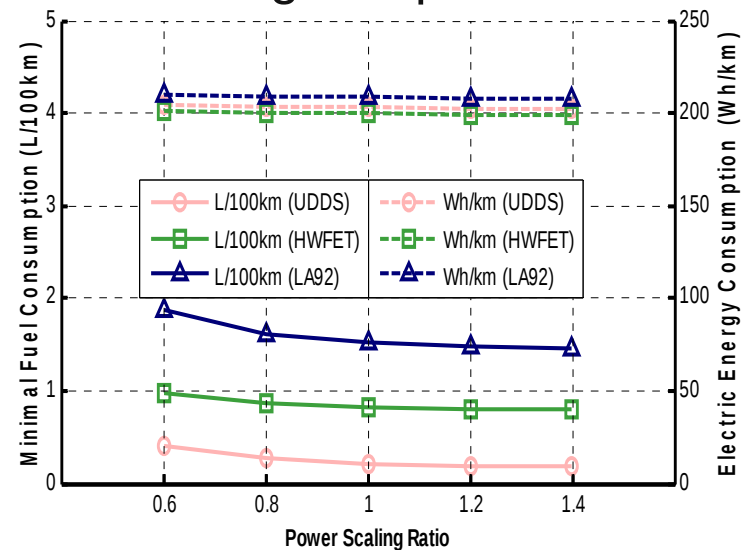

Influence of Battery Power
Using Global Optimization

References

USABC RFP - http://www.uscar.org/guest/article_view.php?articles_id=97

■ ***Comparison of Powertrain Configuration for Plug-in HEVs from a Fuel Economy Perspective***

Freyermuth, V., Fallas, E., Rousseau, A.
SAE 2008-01-0461, SAE World Congress, April 2008

■ ***Impact of Component Size on Plug-in Hybrid Vehicles Energy Consumption using Global Optimization***

Karbowski, D., Haliburton, C., Rousseau, A.
EVS23, Dec. 2007

■ ***Research on PHEV Battery Requirements and Evaluation of Early Prototypes***

Rousseau, A., Shidore, N., Carlson, R., Freyermuth, V.
AABC 2007, May 2007

■ ***Midsized and SUV Vehicle Simulation Results for Plug-in HEV Component Requirements***

Sharer, P., Rousseau, A., Pagerit, S., Nelson, P.
SAE 2007-01-0295, SAE World Congress, April 2007

■ ***Vehicle Simulation Results for PHEV Battery Requirements***

Sharer, P., Rousseau, A., Nelson, P., Pagerit, S.
EVS22, October 2006